SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : KS1A(P)_Rev.1

Model :

CZ20F32TSXXEH	CZ20F32ZSXXEH
CZ20F42ZSXXEH	CZ20H12TSXXEH
CZ20H42TSXXEH	CZ21F52TSXXEH
CZ21H42TSXXEH	CZ21S43NSXXEH
CZ21V53NSXXEH	

SERVICE Manual

COLOR TELEVISION RECEIVER

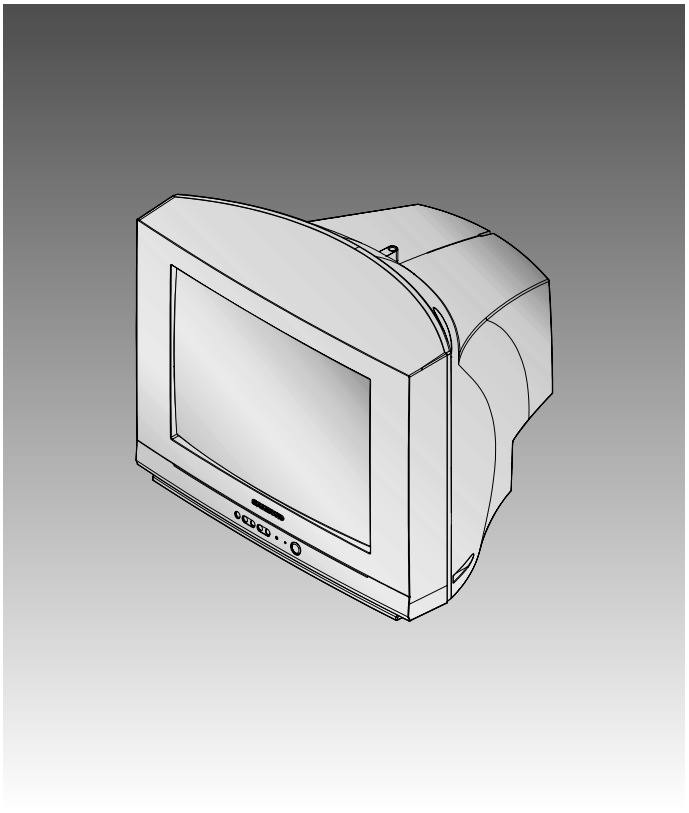

CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electrical Parts List
8. Block Diagram
9. Wiring Diagram
10. Schematic Diagrams

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
   Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

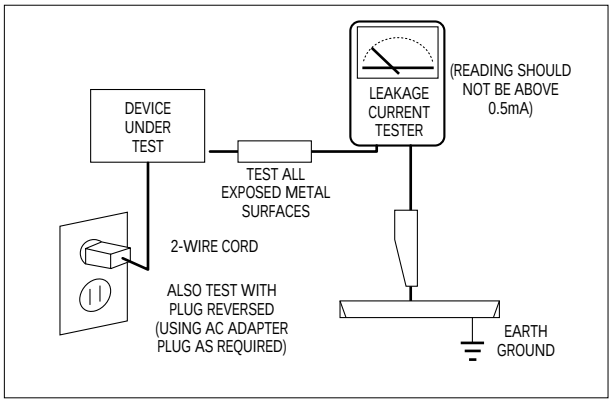
DEVICE UNDER TEST
LEAKAGE CURRENT TESTER
(READING SHOULD NOT BE ABOVE 0.5mA)
TEST ALL EXPOSED METAL SURFACES
2-WIRE CORD
ALSO TEST WITH PLUG REVERSED (USING AC ADAPTER PLUG AS REQUIRED)
EARTH GROUND

Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X–ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (⚡) or (⚠).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.

2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.

3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.

4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.

5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).

6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.

7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.

8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.

2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)

3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.

4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.

5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.

6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.

7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.

8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.

9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Specifications and IC Data

2-1 Specifications

Television System:

MODEL	SYSTEM
CI	PAL-I (UHF)
CII	PAL-I (VHF/UHF)
CX	PAL-B/G, SECAM-B/G
CK	PAL-B/G, D/K, SECAM-B/G, D/K
CW	PAL-B/G, D/K, SECAM-B/G, D/K, NT 4.43
CS	PAL-B/G, D/K, SECAM-B/G, D/K, NT4.43, NT3.58

Channels:

System / Band	PAL/SECAM-B/G,I	PAL, SECAM- D/K	SECAM-K1, PAL-D	NTSC - M
VHF	2 - 12	1 - 13	2 - 9	2 - 13
UHF	21 - 69	21 - 69	13 - 57	14-69

Intermediate Frequencies (MHz) :

SYSTEM / IF Carrier Frequency	PAL/ SECAM- B/G	PAL/SECAM-D/K, SECAM-K1	PAL - I	NTSC - M
Picture IF Carrier	38.90	38.90	38.90	38.90
Sound IF Carrier	33.40	32.40	32.90	34.40
Color Sub Carrier	34.47	34.47	34.47	35.32

Picture Tube:

14 Inch	A34KQV42X	Quick start, in-line-gun,
20 Inch	A48KRD82X(H)	Black stripe, 90°degree deflection
21 Inch	A51KQJ63X	

Power Requirements: AC 100~240V, 50/60Hz

Antenna Input Impedance: VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type)

Speaker Impedance
8 ohm, 5W+5W (Dual Type)
16 ohm, 3W (Monitor Type & Dual Type)

2-2 IC Line Up

Table 2-1 IC Line-Up

Loc. No	Specification	Description	Remark
HC101	PAP103	IF PRE-AMP	
IC201S	SPM802ER	TTX, English/Croatian/Romanian/Hungarian/Polish/Czech/ Bulgarian/Russian/Portugal	Philips
	SPM802ERN	W/O TTX, English/Croatian/Romanian/Hungarian/Polish/Czech/ Bulgarian/Russian/Portugal	
IC301	LA7840	VERTICAL OUTPUT	Sanyo
IC501	TDA6107Q	RGB DRIVE AMP	Philips
IC601	TDA7266S	SOUND-AMP (3W x 1CH or 3W x 2CH or 5W x 2CH)	
IC801S	KA5Q0765R	POWER IC (STR)	
IC802	KA7632	CUSTOM REGULATOR (5V, 8V, 3.3V)	
IC902	24C08/KS28C040	EEPROM	
PC801S	TCET1108 / LTV817B	PHOTO COUPLER	
IC101	U4468B	SIF - IC	TEMIC

2-3 Semiconductor Base Diagrams

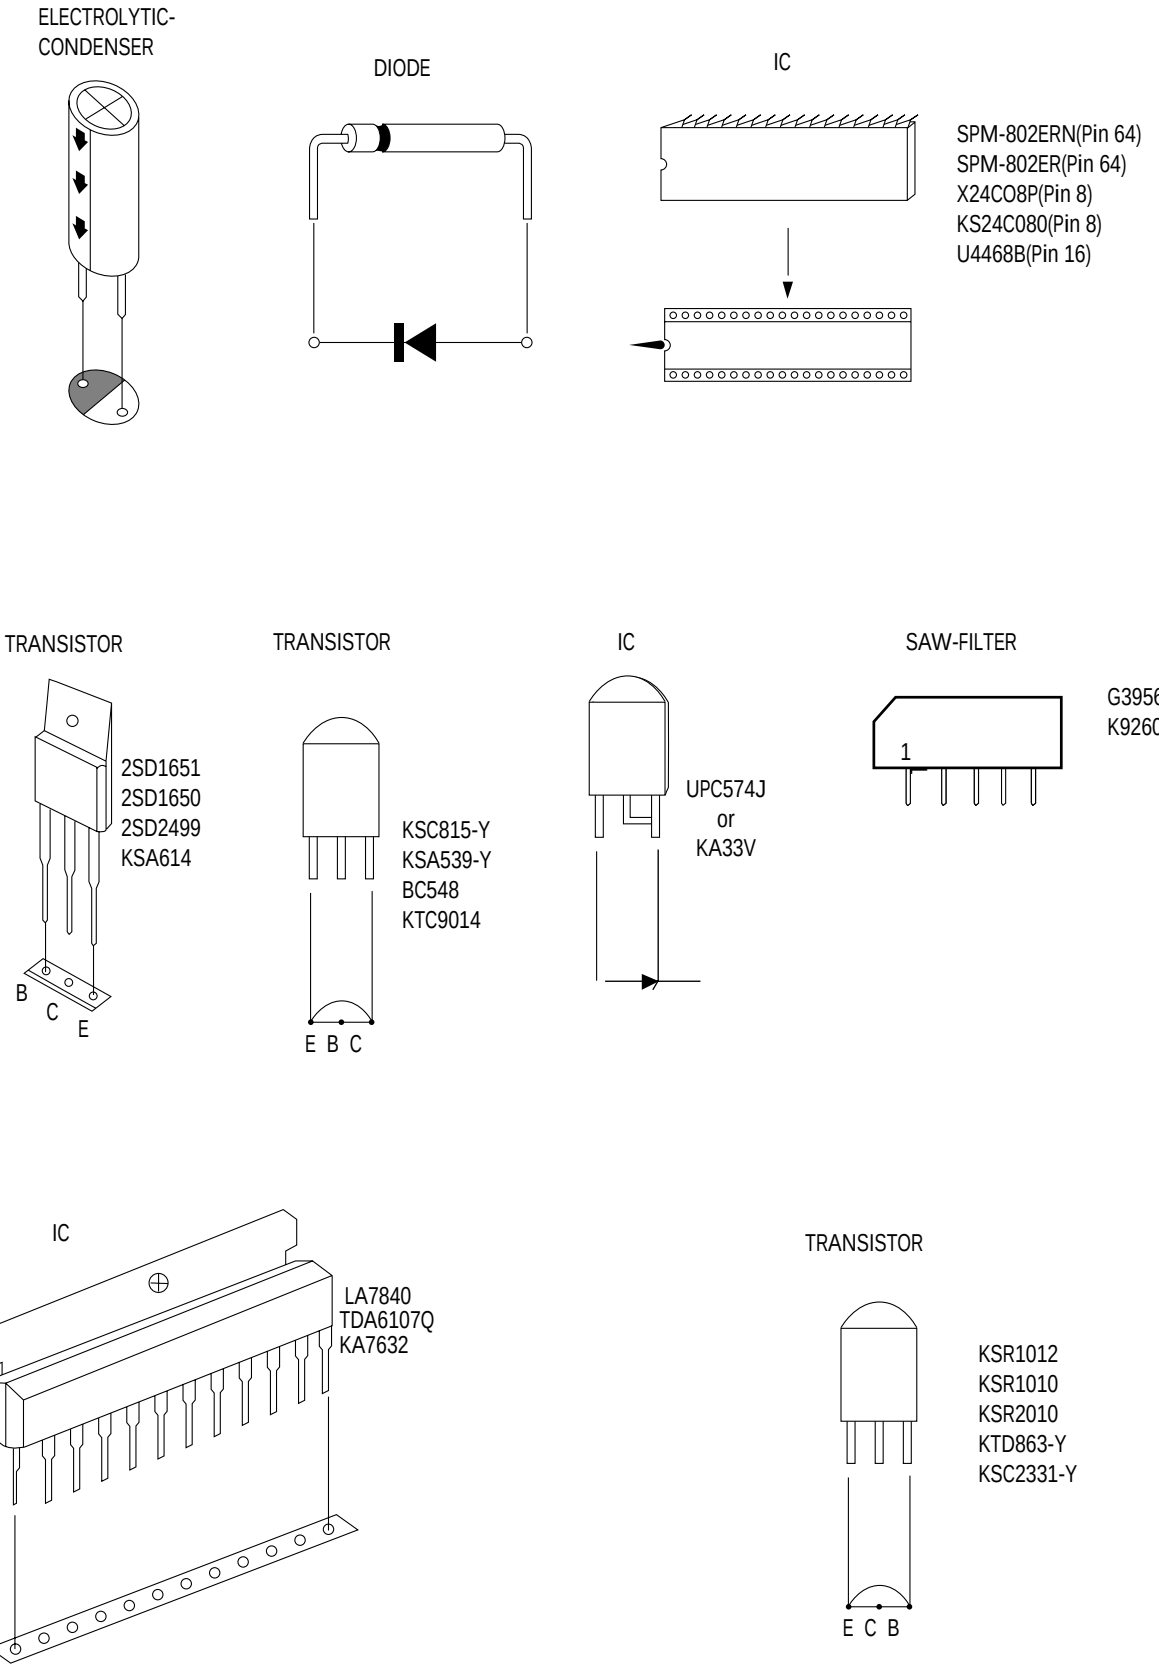

Fig. 2-1 Semiconductor Base Diagrams

MEMO

4. Alignment and Adjustments

4-1 Preadjustment

4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.

2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.

3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

4-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.

2. After IC902 is replaced, warm up the TV for 10 seconds.

4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :

   White Balance
   Sub-Brightness
   Vertical Center
   Vertical Size
   Horizontal Size
   Fail Safe (This adjustment must be the last step).

2. If the EEPROM or CRT is replaced, set PVA to 40 (factory mode) and set SC as follows.

   14 inch : 0
   20 inch : 9
   21 inch : 9

4-2 Factory/Service Mode

4-2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated by entering the following remote-control sequence :

   (1) DISPLAY→FACTORY.

   (2) STAND-BY→ DISPLAY→ MENU→ MUTE →POWER ON.

2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: ADJUST, OPTION and Reset.

3. Access the Adjustment Mode by pressing the "VOLUME" keys (Up or Down). The adjustment parameters are listed in the accompanying table, and selected by pressing the CHANNEL keys (▲ ,▼).

4. Selection sequences for the all system:

   DOWN or UP key:
   SCT>SBT>BLR>BLB>RG>GG>BG>VSL>
   VS>VA>HS>SC>SDL>STT>SSP>PDL>
   NDL>PSR>NSR>AGC>VOL>LCO>TXP

5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.

6. Cancel the Adjustment Mode by re-pressing the "FACTORY" or "Power OFF" keys.

4-2-2 Main Adjustment Parameter

OSD	FUNCTION	RANGE	INITIAL DATA	REMARK
SCT	Sub Contrast	0 ~ 23	13	
SBT	Sub Brightness	0 ~ 23	9	
BLR	Black Level offset Blue	0 ~ 15	9	
BLB	Black Level offset Red	0 ~ 15	7	
RG	Red Gain	0 ~ 63	32	
GG	Green Gain	0 ~ 63	25(Fix)	
BG	Blue Gain	0 ~ 63	31	
VSL	Vertical Slope	0 ~ 63	19	
VS	Vertical Shift	0 ~ 63	38	
VA	Vertical Amplitude	0 ~ 63	40(Fix)	
HS	Horizontal Shift	0 ~ 63	30	
SC	S-Correction	0 ~ 63	9	
CDL	Cathode Drive Level	0 ~ 15	9	
STT	Sub Tint	0 ~ 7	3	
SSP	Sub Sharpness	0 ~ 7	0	
PDL	PAL Delay	0 ~ 15	15(Fix)	
NDL	NTSC Delay	0 ~ 15	10	
PSR	PAL Sub coloR	0 ~ 23	2	
NSR	NTSC Sub coloR	0 ~ 23	5	
AGC	Automatic Gain Control	0 ~ 63	23	
VOL	Volume pre setting	0 ~ 63	10	
LCO	SECAM-L Vision IF	0 ~ 1	0	
TXP	TTX Position	0 ~ 15	9	

NOTE : PVS,PVA, PHS, parameters must be aligned using the 50Hz vertical-field rates.

4-2-3 Option Bytes

In the Service Mode, various can be selected via the Option Table. Example:

Option Table : xx xx xx xx

1	LNA	ON
2	SYSTEM	CZ
3	AUDIO	MONO
4	JACK	RCA
5	ZOOM	NOR/ZOOM/16:9
6	AUTO POWER	ON
7	SBL	OFF
8	2nd SIF	ON
9	HOTEL MODE	OFF
10	BKS	ON

4-2-4 RESET

The Reset Mode is used during factory inspection.
Function Reset:

1.	Picture	Custom
2.	Auto Volume	Off
3.	Color System	Auto (option)
4.	Sound System	D/K (option)
5.	Blue Screen	Off
6.	Low Noise AMP	Off (option)
7.	Volume	10
8.	CH. Skip	Erased
9.	CH. Lock	Off
10.	Timer	Off

4-3 Other Adjustments

4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.

2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.

3. Use the specified test equipment or its equivalent.

4. Correct impedance matching is essential.

5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.

6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.

7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.

8. To protect against shock hazard, use an isolation transformer.

4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +125 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 27.5KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 27.5KV under any conditions.

4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

4-3-5 Cathode Voltage Adjustment (Screen Adjustment)

1. Connect CRT socket pin GK to an oscilloscope probe.
2. Input a gray scale pattern. (Use a pattern generator, PM5518)
3. Use the P mode key (on the remote control) for the STANDARD picture.
4. Adjust the Screen VR (on the FBT) so that the voltage on the oscilloscope becomes 120±2.5V (See Fig. 4-1).

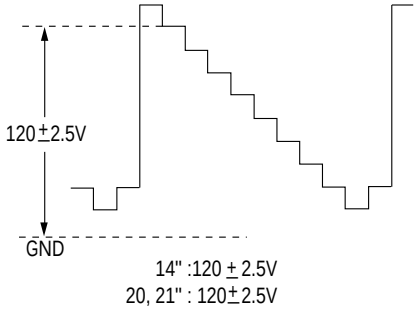

Fig. 4-1

4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-2.
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-3).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

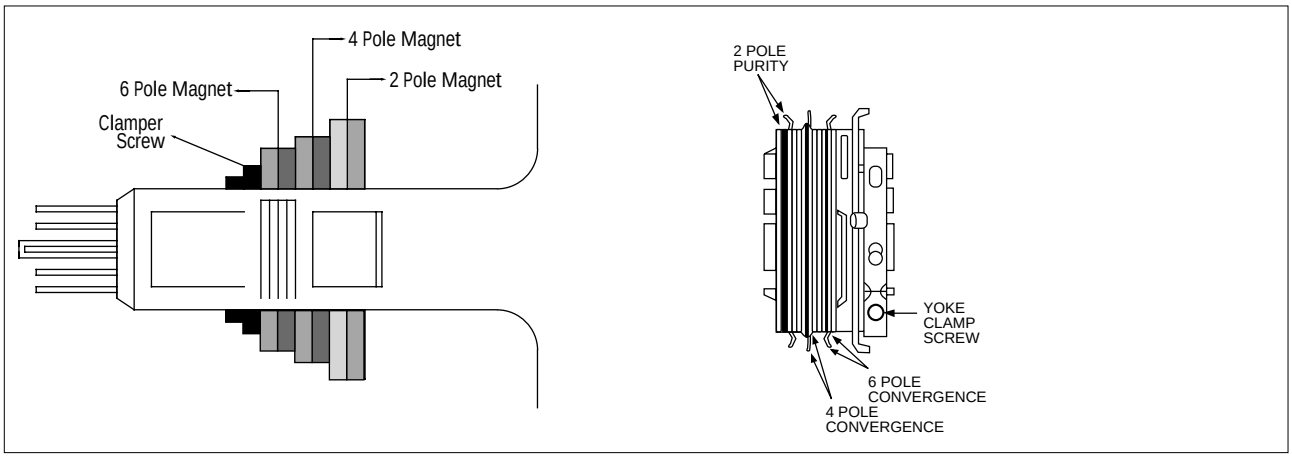

Fig. 4-2 Convergence Magnet Assembly

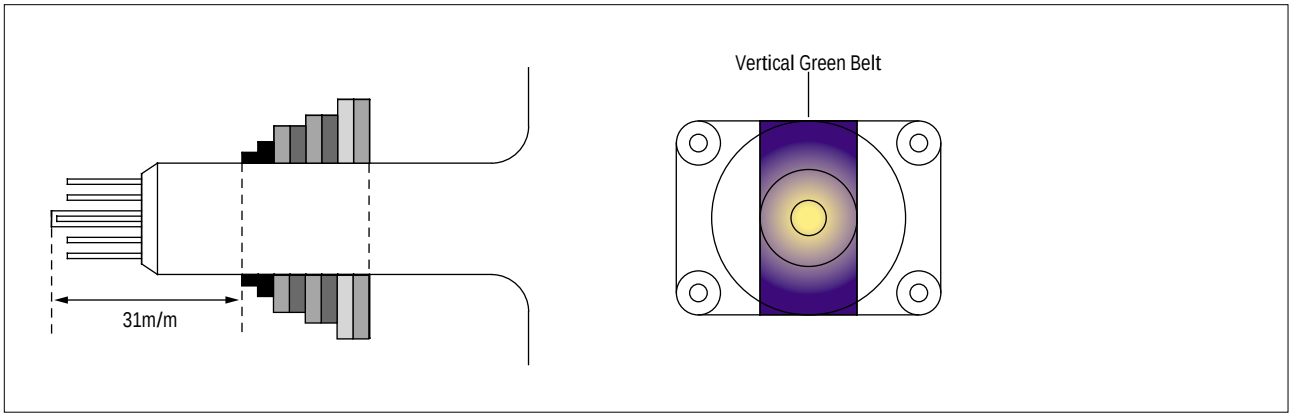

Fig. 4-3 Center Convergence Adjustment

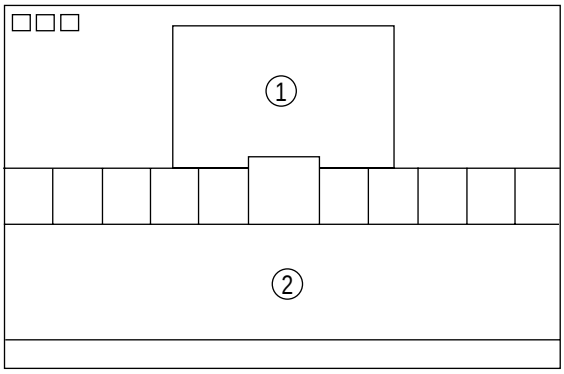

Fig. 4-4

4-3-7 White Balance Adjustment

(a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

   DISPLAY →FACTORY → FACTORY

2. Input a Toshiba pattern.

(b) Low-Light Adjustment

1. Set SBT to 3.5 ± 0.5 fL in the Factory Service Mode with using CA100. See Fig. 4-4 ②.

2. Adjust RG,BG so that the levels are suitable to each local area.

(c) High-Light Adjustment

1. Set SCT to 55 FL (20". 21"), 65 FL(14") in the Factory Service Mode with using CA100. See Fig. 4-4 ①.

4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.

2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.

3. Adjust the Brightness and Contrast controls for a well defined picture.

4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.

5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.

6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)

7. Repeat adjustments 2~6, if necessary.

8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-5).

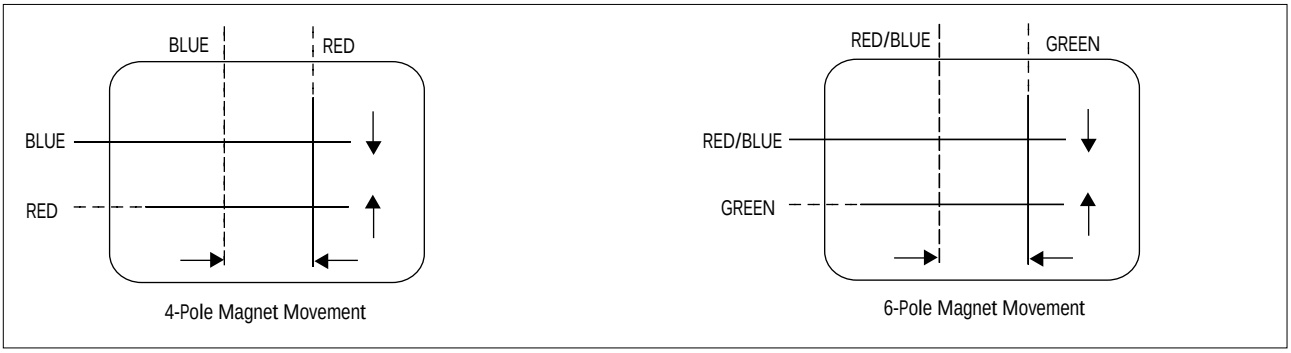

Fig. 4-5 Center Convergence Adjustment

4-3-9 RF AGC Adjustment

Set the AGC data to 23 (Factory Mode).

4-3-10 Sub-Color Adjustment

Set $\begin{matrix}\text{PSR}\\\text{NSR}\end{matrix}$ data to $\begin{matrix}2\\5\end{matrix}$ (Factory Mode).

4-3-11 Geometry Adjustment

SC →VS→VSL→HS

1. Input a lion head pattern (in the PAL channel).
2. Set the SC (S-Correction) as follows : 9 (21”), 9 (20”), 0 (14”) and VA 40 so that the lion head circle becomes oval.
3. Adjust with VSL (Vertical-Slope) so that the bottom margin of the picture is 4.



Fig. 4-7

4. Adjust with VS (Vertical shift) so that the top margin of the picture is 4.



Fig. 4-8

5. Adjust with HS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.



Fig. 4-9

6. Adjust HS (using the width coil) so that the left and right margins of the picture are 5.

5. Troubleshooting

5-1 No Video (Raster On, No Sound)

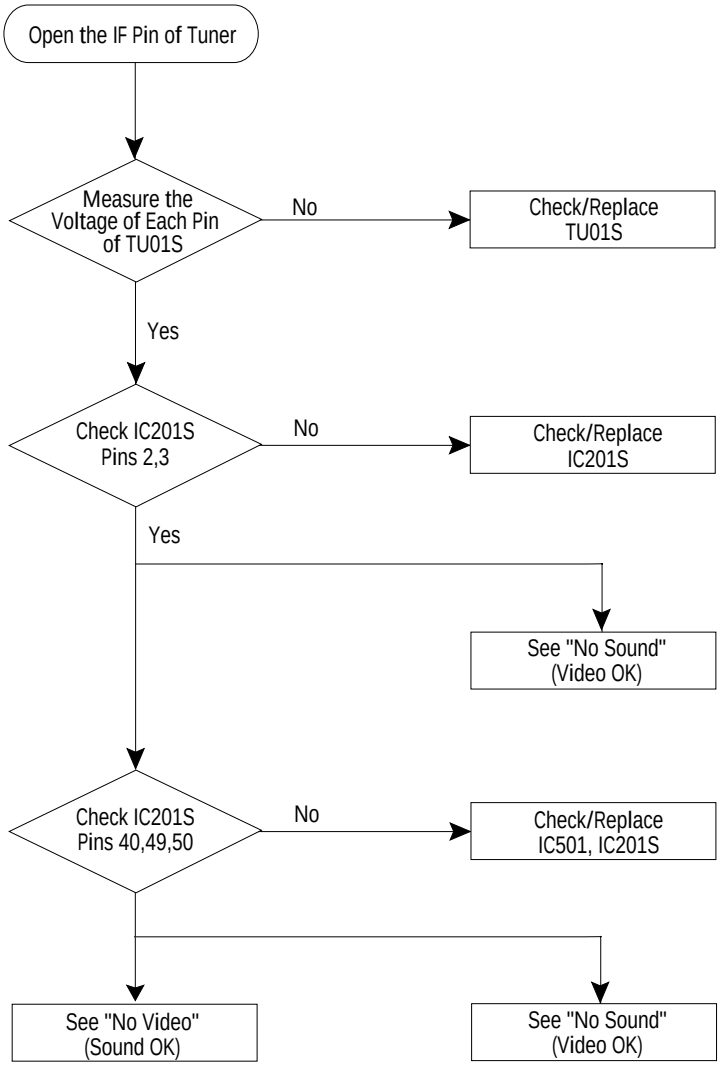

5-2 No Power

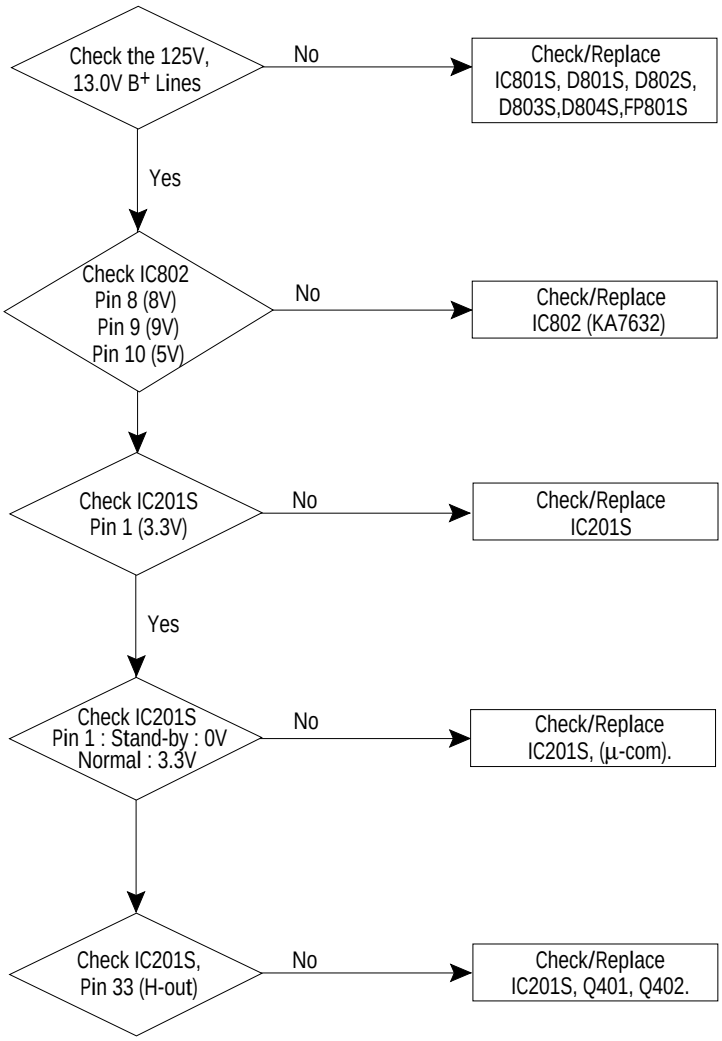
Check the 125V, 13.0V B+ Lines
No
Check/Replace IC801S, D801S, D802S, D803S,D804S,FP801S
Yes
Check IC802 Pin 8 (8V) Pin 9 (9V) Pin 10 (5V)
No
Check/Replace IC802 (KA7632)
Check IC201S Pin 1 (3.3V)
No
Check/Replace IC201S
Yes
Check IC201S Pin 1 : Stand-by : 0V Normal : 3.3V
No
Check/Replace IC201S, (μ-com).
Check IC201S, Pin 33 (H-out)
No
Check/Replace IC201S, Q401, Q402.

5-3 No Video (Sound OK)

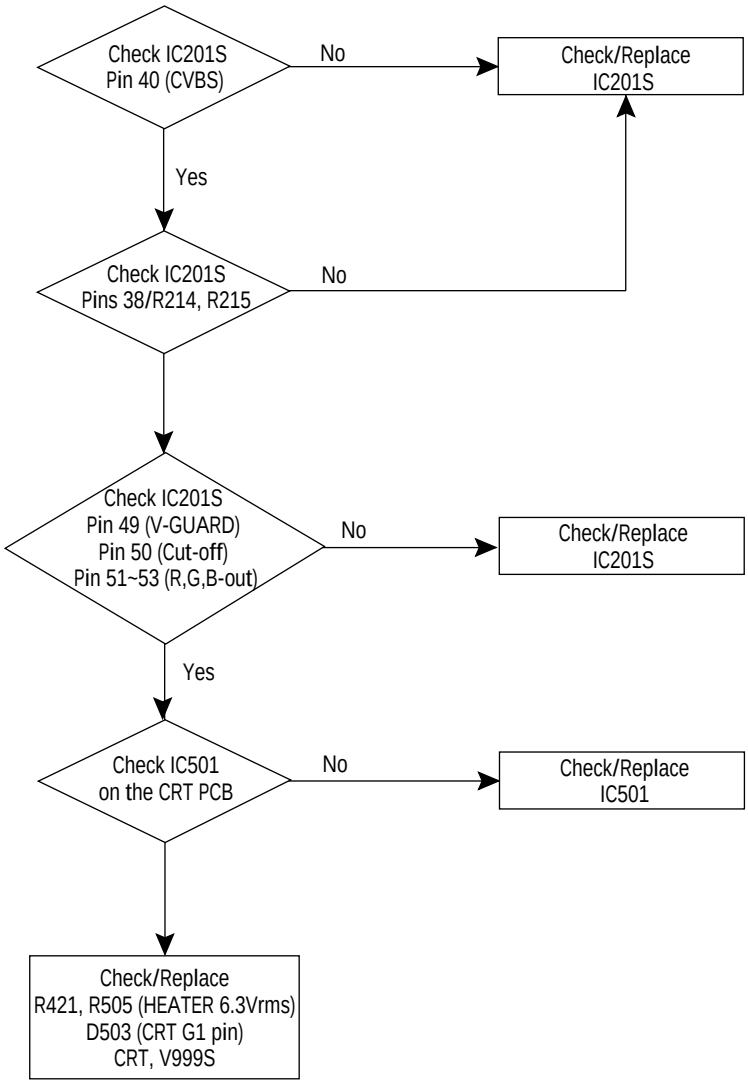

5-4 No Sound (Video OK)

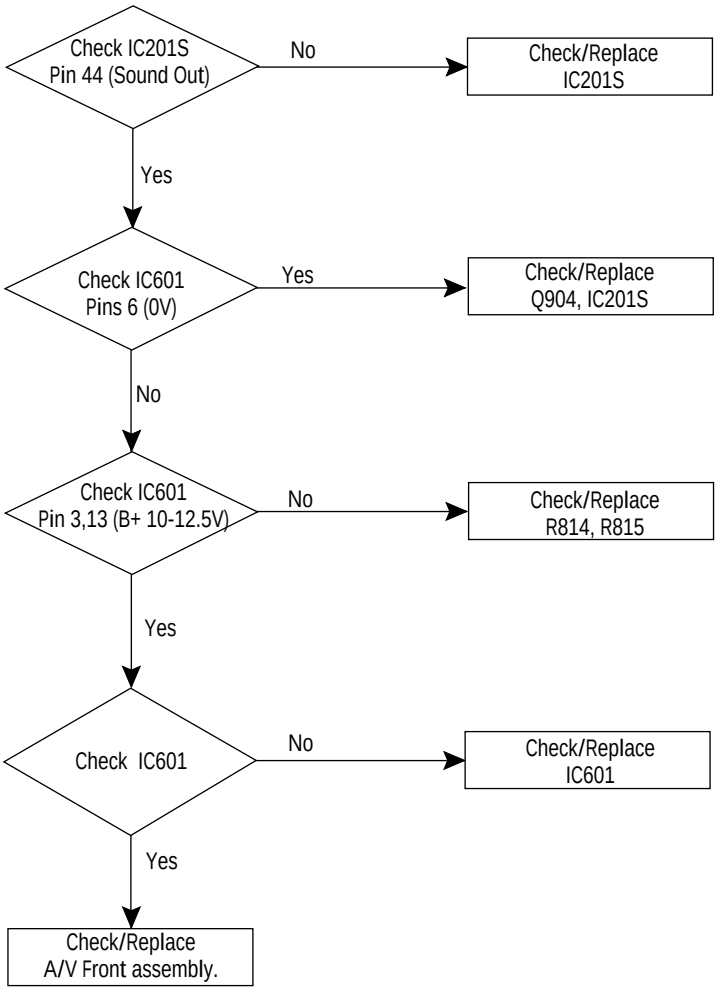

5-5 No TTX

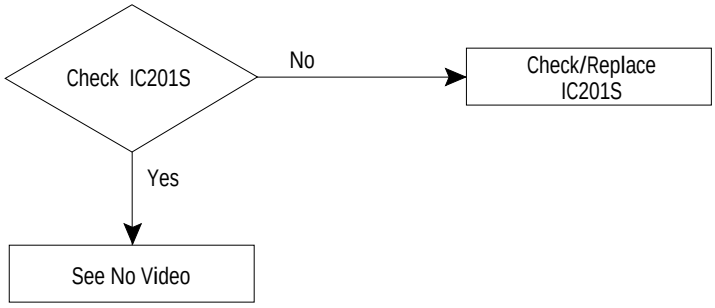

6. Exploded View & Parts List

6-1 CZ20F32TSXXEH

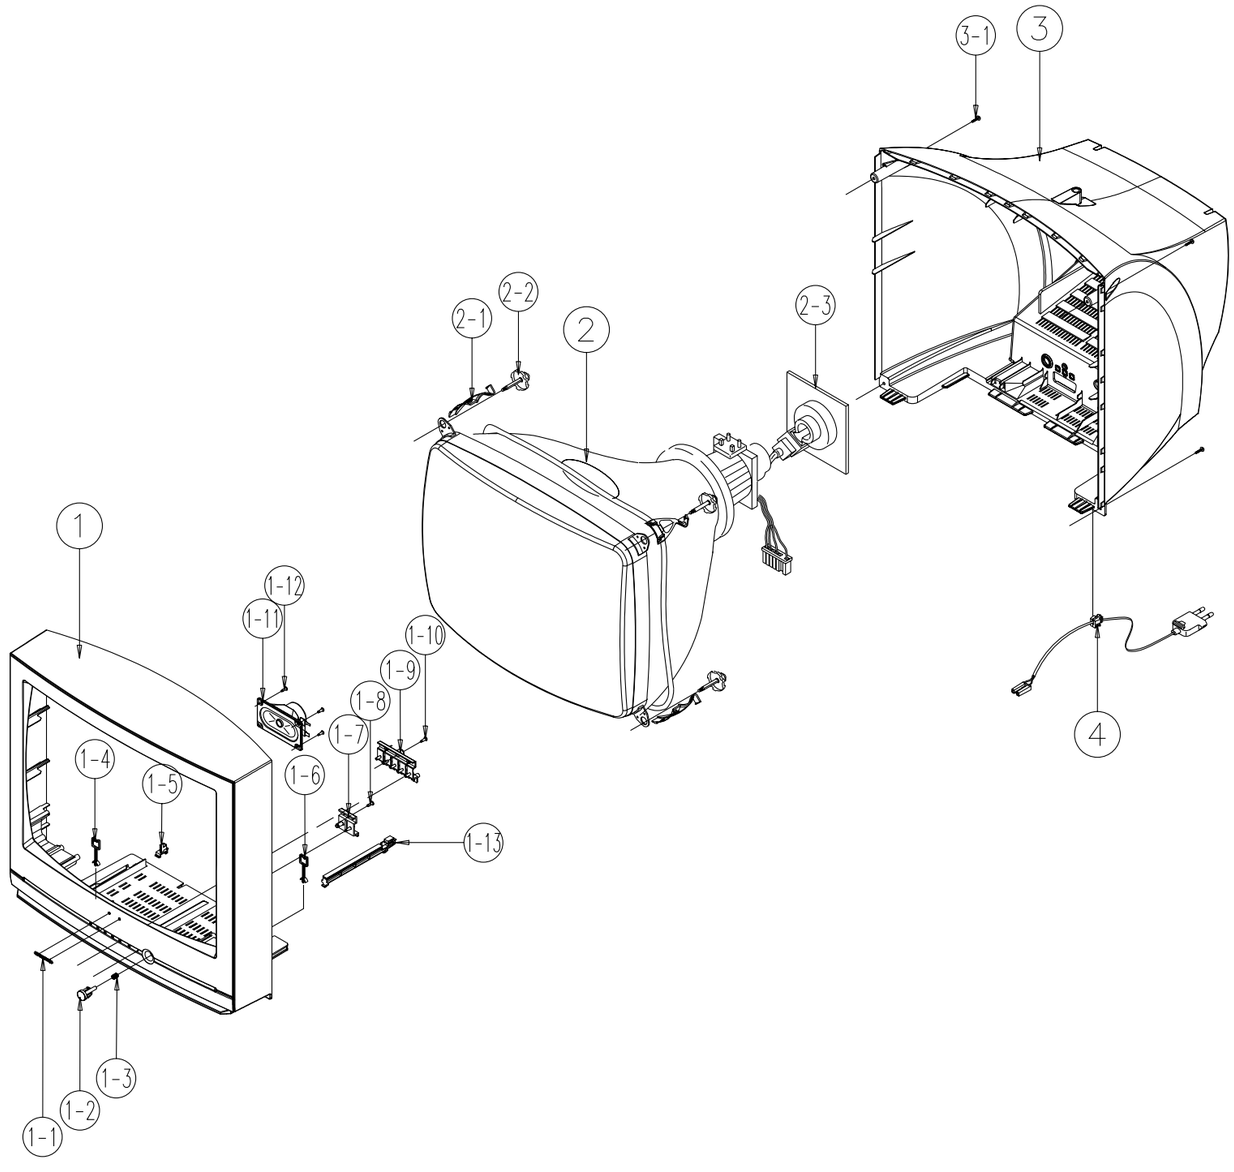

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01211A	ASSY COVER P-CAINET FRONT;20F3,HIPS HB,G		1		
1*	AA64-03019A	CABINET-FRONT;20F3,HIPS,HB		1		
1-1	AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S		1		
1-2	AA64-03008A	KNOB-POWER;14F3,ABS,HB,G3676,SVM-3012		1		
1-3	AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,		1		
1-4	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		
1-5	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-6	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,		1		
1-7	AA64-03012A	WINDOW-RMC,LED;14F3,PC,CLR		1		
1-8	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	WR+CF	
1-9	AA64-03007A	KNOB-CONTROL;14F3,ABS,HB,G3676,SVM-3012		1		
1-10	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	KC+CF	
1-11	AA96-01188A	ASSY HOLDER SPK;16OHM,3001-001008,AA39-2		1		
1-12	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	CF+SPK	
1-13	HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY		1		
2	AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2		SCREW-ASS'Y				
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-03020A	CABINET-BACK;20F3,HIPS,HB		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CF+CB	
4	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

6-2 CZ20F42ZSXXEH

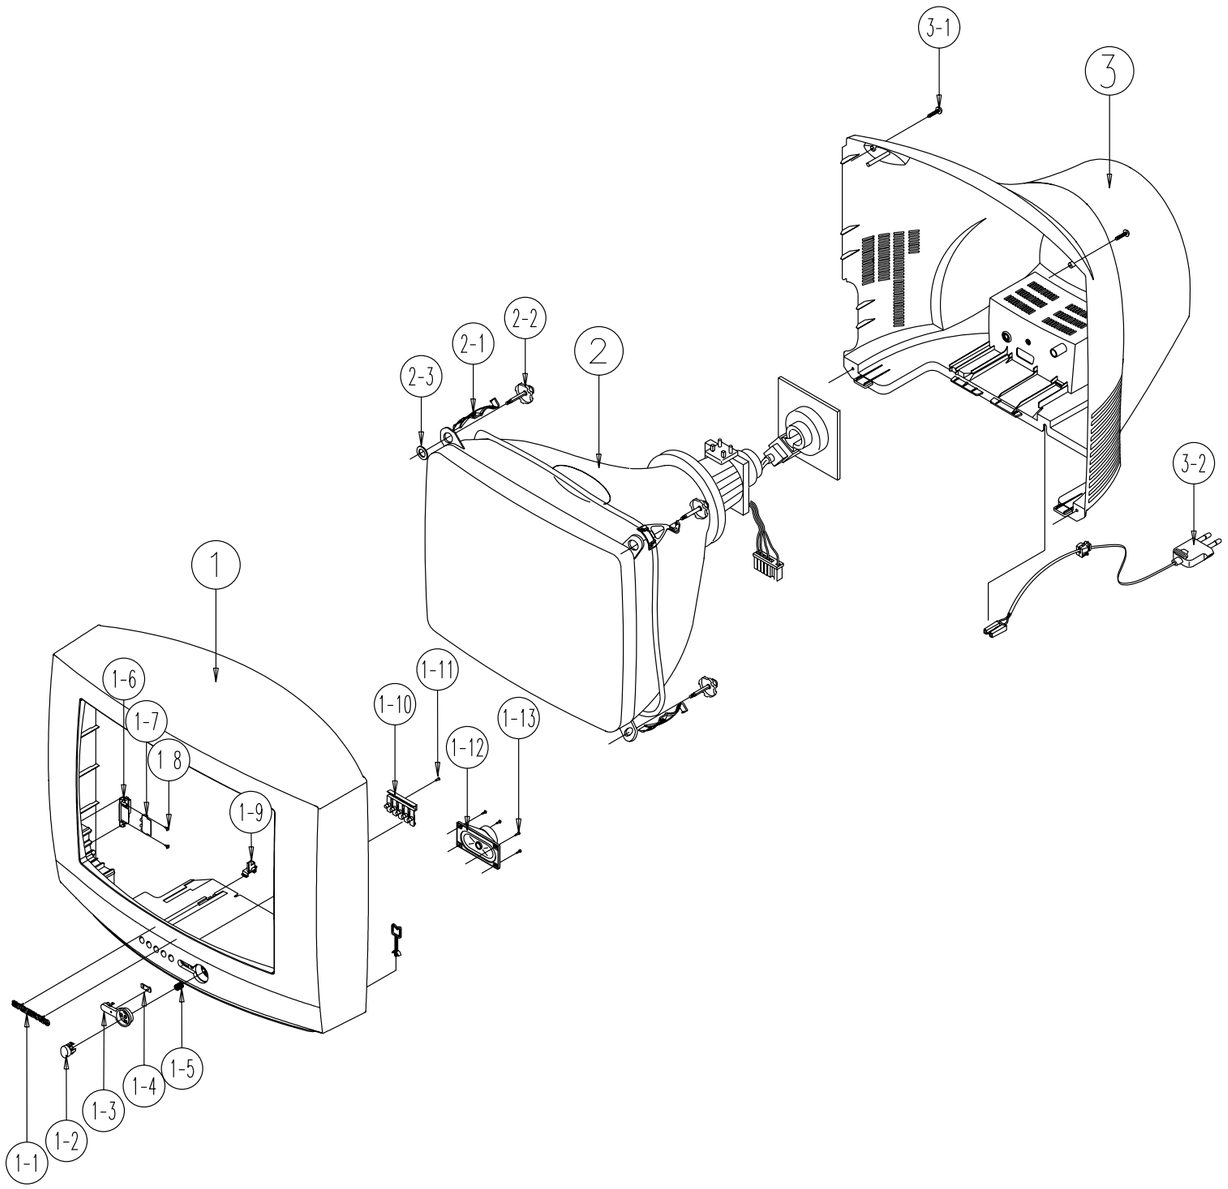

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	HA91-00889A	ASSY CABINET FRONT;20F4,SV-011P-II		1		
1*	AA64-02396A	CABINET-FRONT;20F4,HIPS,HB,SV-012P-II,GR		1		
1-1	AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S		1		
1-2	AA64-02491A	KNOB POWER;20H3,HIPS,HB,BLK		1		
1-3	HA64-01339A	WINDOW-REMOCON;WINDOW-REMOCON;20H3,PC,VI			1	
1-4	HA64-01340A	INDICATOR-LED;INDICATOR-LED;20H3,ACRYL,		1		
1-5	AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,		1		
1-6	HA61-00494A	HOLDER-AV;TOOL,20F4,-,-,-,-,MOLD		1		
1-7	AA95-00946A	ASSY ETC-A/V SIDE;-,20F4,S15A,PAL,-,MONO		1		
1-8	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW		2	CF+AV	
1-9		STOPPER-PCB				
1-10	AA64-02452A	KNOB CONTROL;20H3,HIPS,HB,BLK		1		
1-11	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	KC+CF	
1-12	AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3		1		
1-13	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		8	SPK+CF	
2	AA94-05857A	ASSY CRT;A48JLL90X02(W),450MG,20,ITC,O		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-		1	V999S	
3	HA64-02382B	CABINET BACK;20F4,VL-1823,GRY		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

6-3 CZ20H12TSXXEH

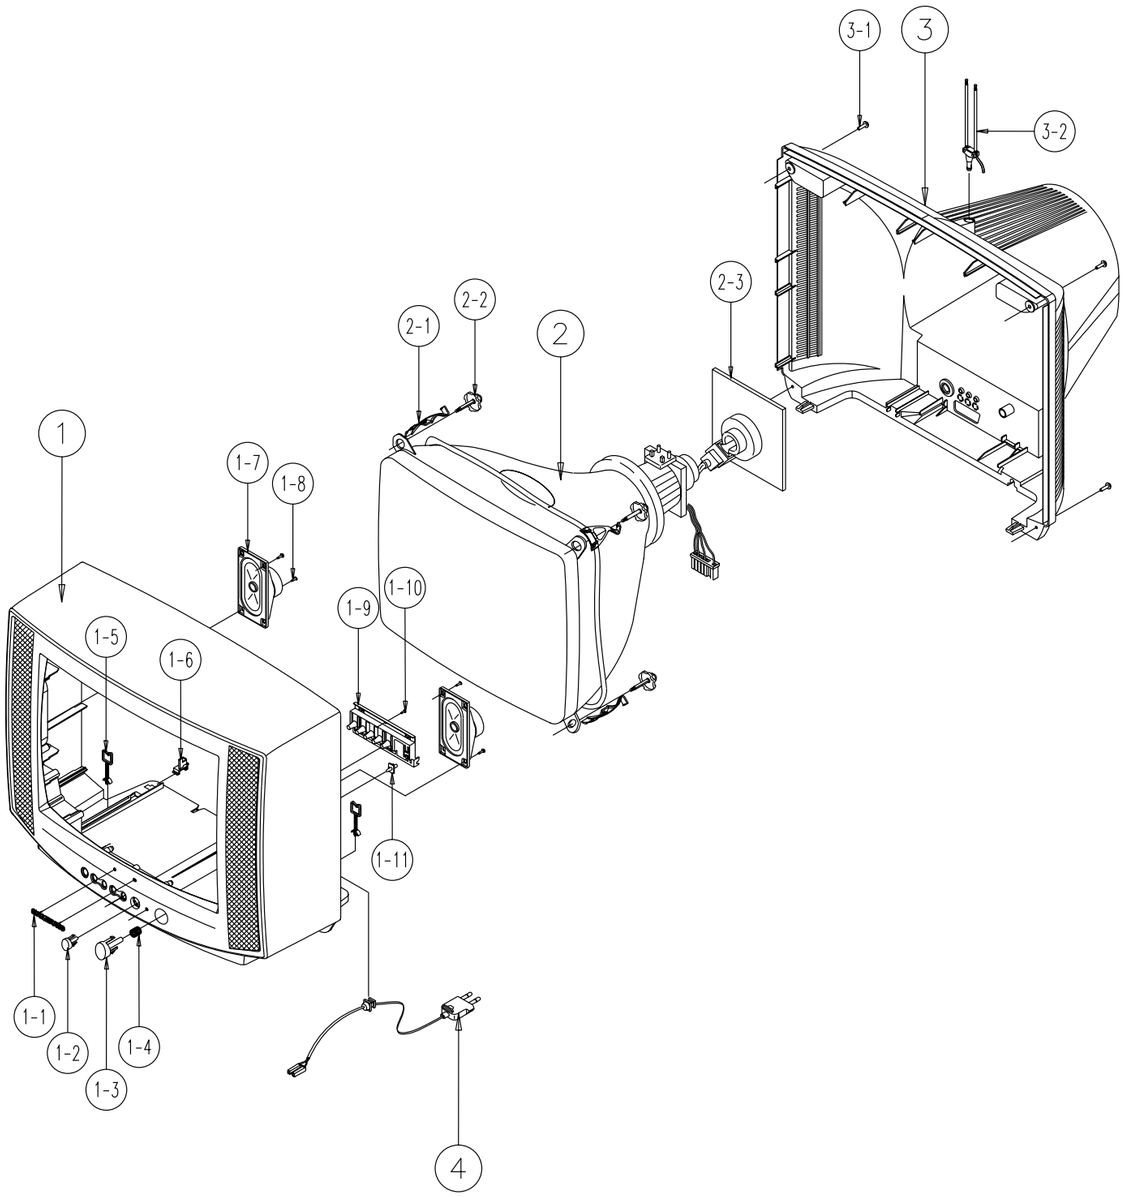

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	HA91-00873B	ASSY CABINET FRONT;20H1,SV-011P-II		1		
1*	AA64-02359B	CABINET-FRONT;20H1,HIPS,HB,SV-012P-II,GR		1		
1-1	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20		1		
1-2	AA64-40527A	WINDOW-REMOCON;-,21H1,-,PC,-,-,-		1		
1-3	AA64-02490B	KNOB POWER;20H1,HIPS,HB,SV-012P-II,GRY		1		
1-4	AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,		1		
1-5	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		
1-6		STOPPER-PCB				
1-7	AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3		1		
1-8	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	SPK+CF	
1-9	AA64-02441B	KNOB CONTROL;20H1,HIPS,HB,SV-012P-II,GRY		1		
1-10	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	KC+CF	
1-11	AA64-40496A	INDICATOR-LED;-,ACRYL,-,-,-,-,-		1		
2	AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	HA64-02378B	CABINET-BACK;21H1,VL-1823,GRAY		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2		ANT ROD				
4	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

6-4 CZ20H42TSXXEH

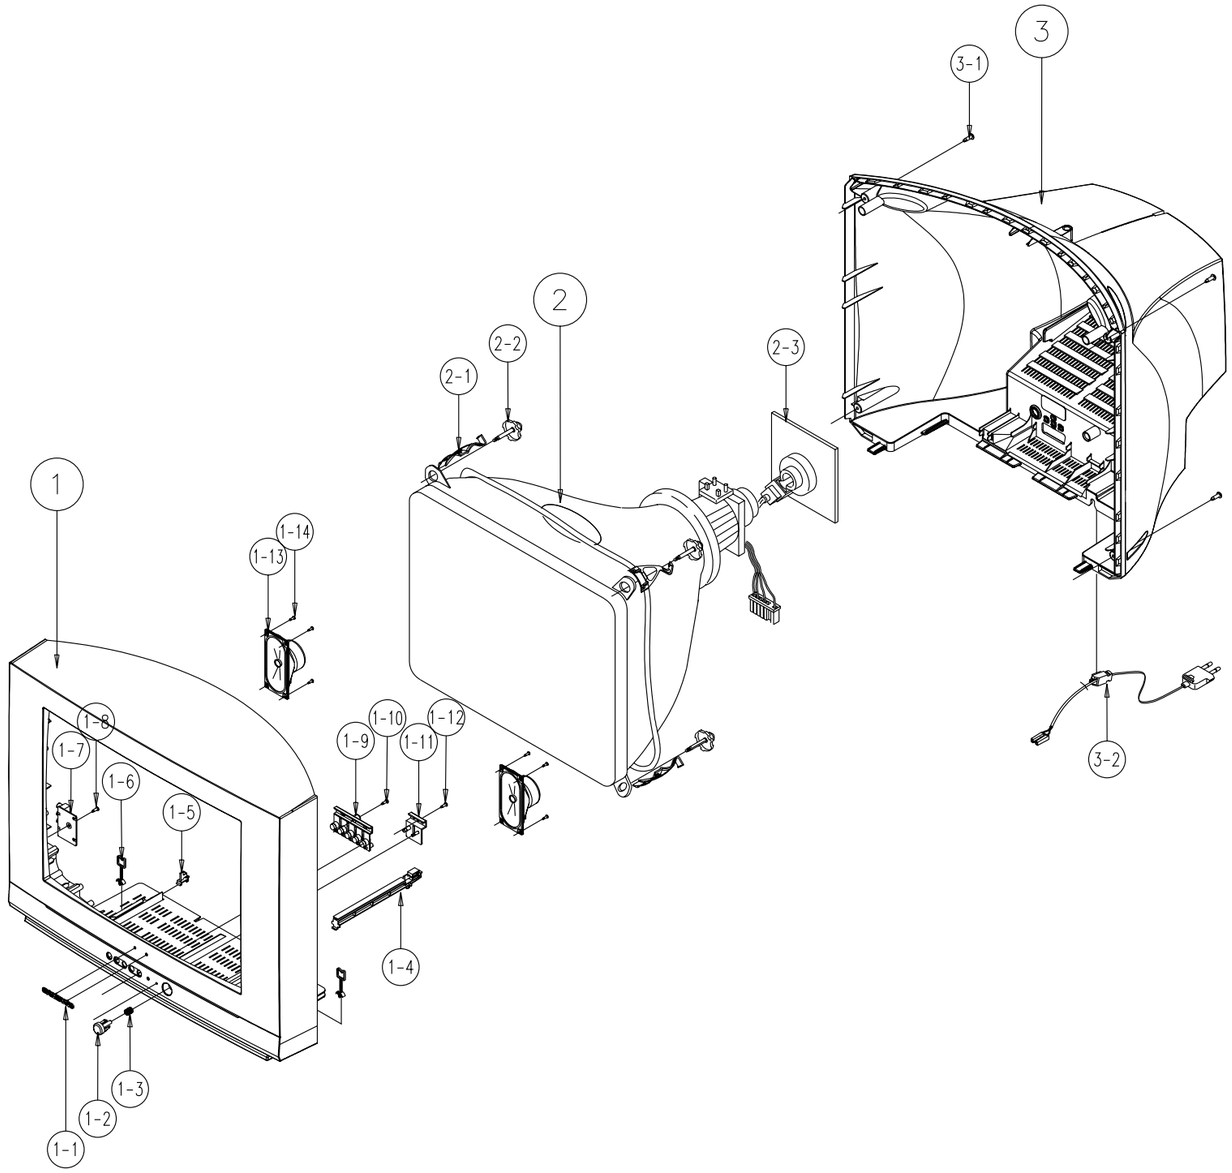

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01168A	ASSY COVER P-C/FRONT;20H4,HIPS HB1				
1*	AA64-03231A	CABINET-FRONT;20H4,HIPS,HB		1		
1-1	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20		1		
1-2	AA64-03233A	KNOB-POWER;20H4,ABS,HB,NO-SILK		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY		1		
1-5	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-6	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,		1		
1-7	AA95-03104A	ASSY ETC-A/V SIDE;,21D8,KS1A		1		
1-8	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW		1	CR+AV	
1-9	AA64-03235A	KNOB-CONTROL;20H4,ABS,HB		1		
1-10	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	KC+CF	
1-11	AA64-03237A	WINDOW-RMC,LED;20H4,ACRYL,CLR		1		
1-12	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	WR+CF	
1-13	3001-000274	SPEAKER;5W,8OHM,90DB,160HZ		2		
1-14	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	SPK +C	
2	AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2		SCREW-ASSY				
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-02904A	CABINET BACK;20H4(SEH),HIPS,HB		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

6-5 CZ21F52TSXXEH

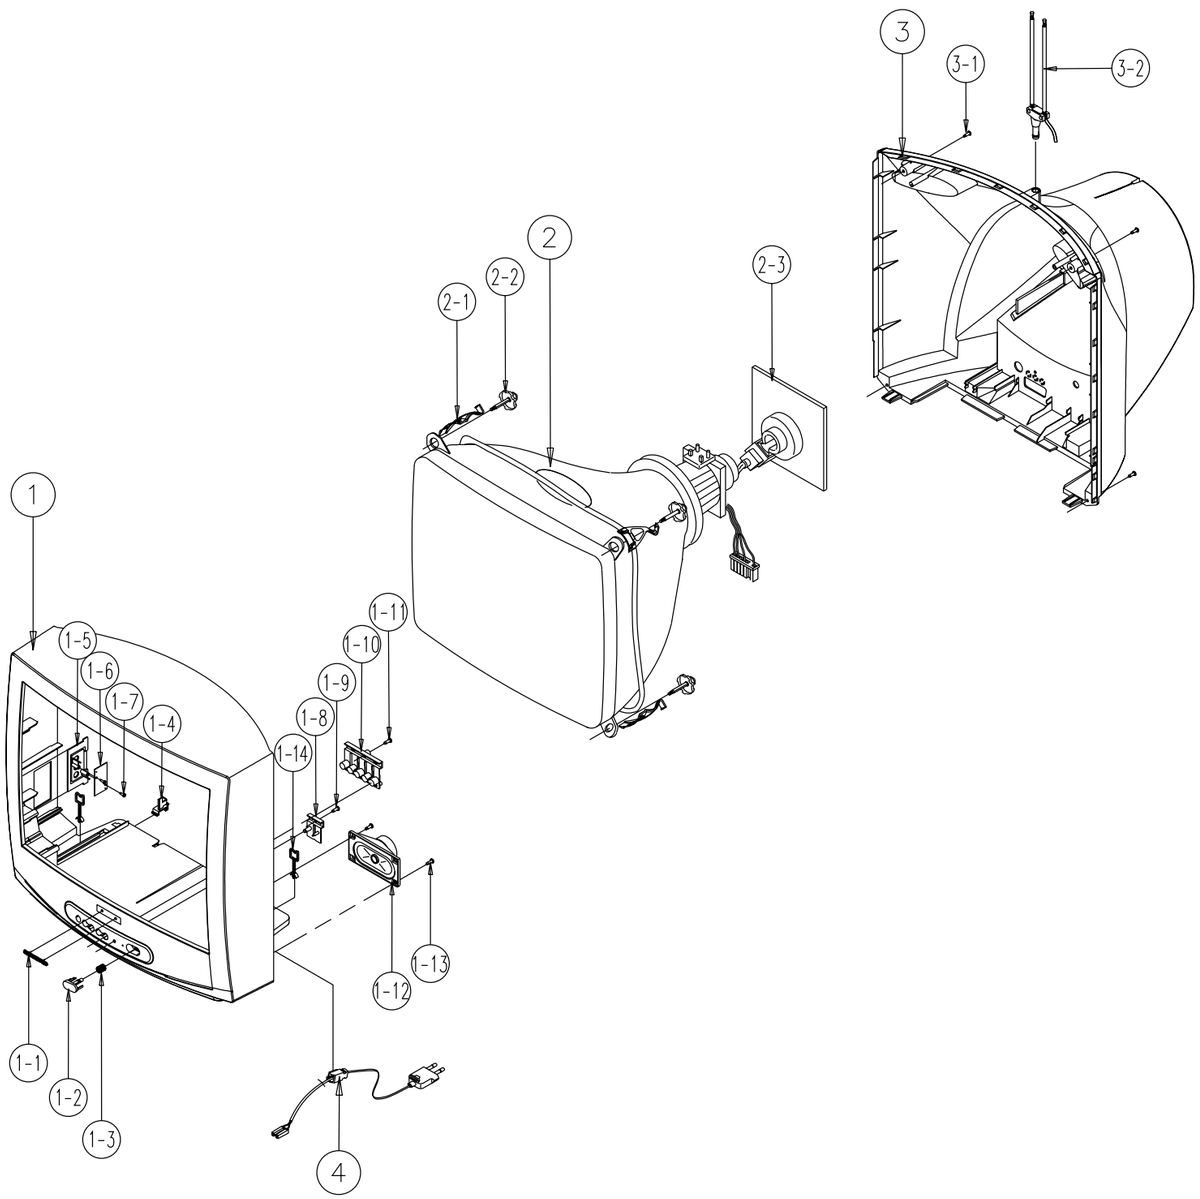

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	HA91-00834A	ASSY CABINET FRONT;21F5,KS0A,HIPS,HB,SV		1		
1*	AA64-02383A	CABINET-FRONT;21F5,HIPS,HB,SV-012P-II,GR		1		
1-1	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20		1		
1-2	AA64-01705C	KNOB POWER;21F5,HIPS,HB,GRY		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-5	HA61-00494A	HOLDER-AV;TOOL,20F4,-,-,-,-,MOLD		1		
1-6	AA41-00208C	PCB-FRONT AV;S4/C5 MODEL,FR-1,1L,C,1.6T,		1	PCB	
1-7	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW		2	PCB+HO	
1-8	HA64-01706B	WINDOW-RMC,LED;21F5,ACRYL,CLEAR		1		
1-9	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	CF+RMC	
1-10	AA64-02471A	KNOB CONTROL;21F5,HIPS,HB,GRY		1		
1-11	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	CF+SPK	
1-12	AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3		1		
1-13	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		8	CF+SPK	
1-14	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		
2	AA94-11633A	ASSY CRT;,+450MG,21,ITC,A51EFS83X191,9		1		
2-1	AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,		4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	HA64-02356B	CABINET BACK;21F5,VL-1823,GRY		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2		ANT-ROD				
4	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

6-6 CZ21S43NSXXEH

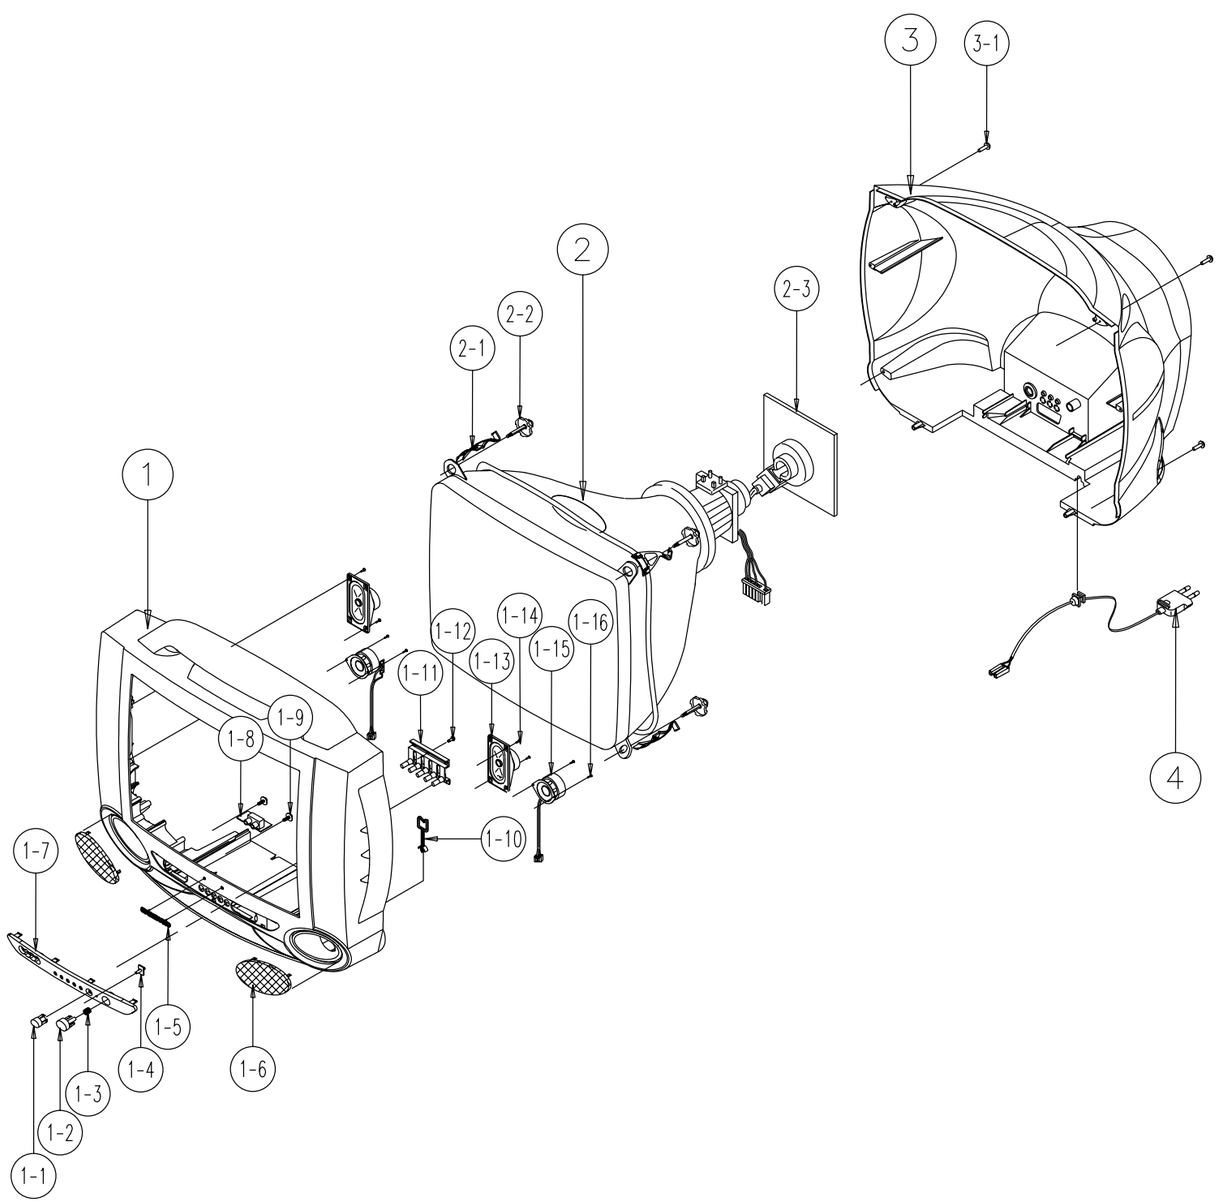

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	HA91-05281A	ASSY-CABINET,FRONT;21S4,KS1A,HIPS,HB			1	
1*	AA64-00706P	CABINET-FRONT;21S4,HIPS,HB,SEH,KS1A			1	
1-1	AA64-00713C	WINDOW REMOCON;21S4,PC,V0,SEH			1	
1-2	AA64-00711D	KNOB POWER;21S4,ABS,HB,SEH			1	
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,			1	
1-4	AA64-00714C	INDICATOR LED;21S4,ACRYL,CLR,SEH			1	
1-5	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20			1	
1-6	AA63-00274A	GRILLE-WOOFER,L;21S4,-,-,-,-,-,-,63-0020			1	
1-6	AA63-00275A	GRILLE WOOFER-R;21S4,-,-,-,-,-,-,63-0020			1	
1-7	AA63-00206P	COVER-CONTROL;21S4,MONO,HIPS,HB,GD-906P,			1	
1-8	AA95-03067A	ASSY ETC-A/V FRONT;,21S4,KS1A,STEREO			1	
1-9	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW		CF+PCB	2	
1-10	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,			1	
1-11	HA64-00709C	KNOBCONTROL;21S4,ABS,HB,SEH			1	
1-12	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		KC+CF	1	
1-13	3001-001088	SPEAKER;5W,8OHM,90DB,250HZ+-50HZ			2	
1-14	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		SPK +C	8	
1-15	3001-001115	SPEAKER;15W,8OHM,93DB,110			2	
1-16	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		TWISTE	4	
2	AA94-05859A	ASSY CRT;A51EER31X,+400MG,21			1	
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,			4	
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		CRT+CF	4	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		V999S	1	
3	HA64-00707J	CABINETBACK;21S4,VL-1823,SEH			1	
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		CB+CF	6	
4	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25			1	

6-7 CZ21V53NSXXEH

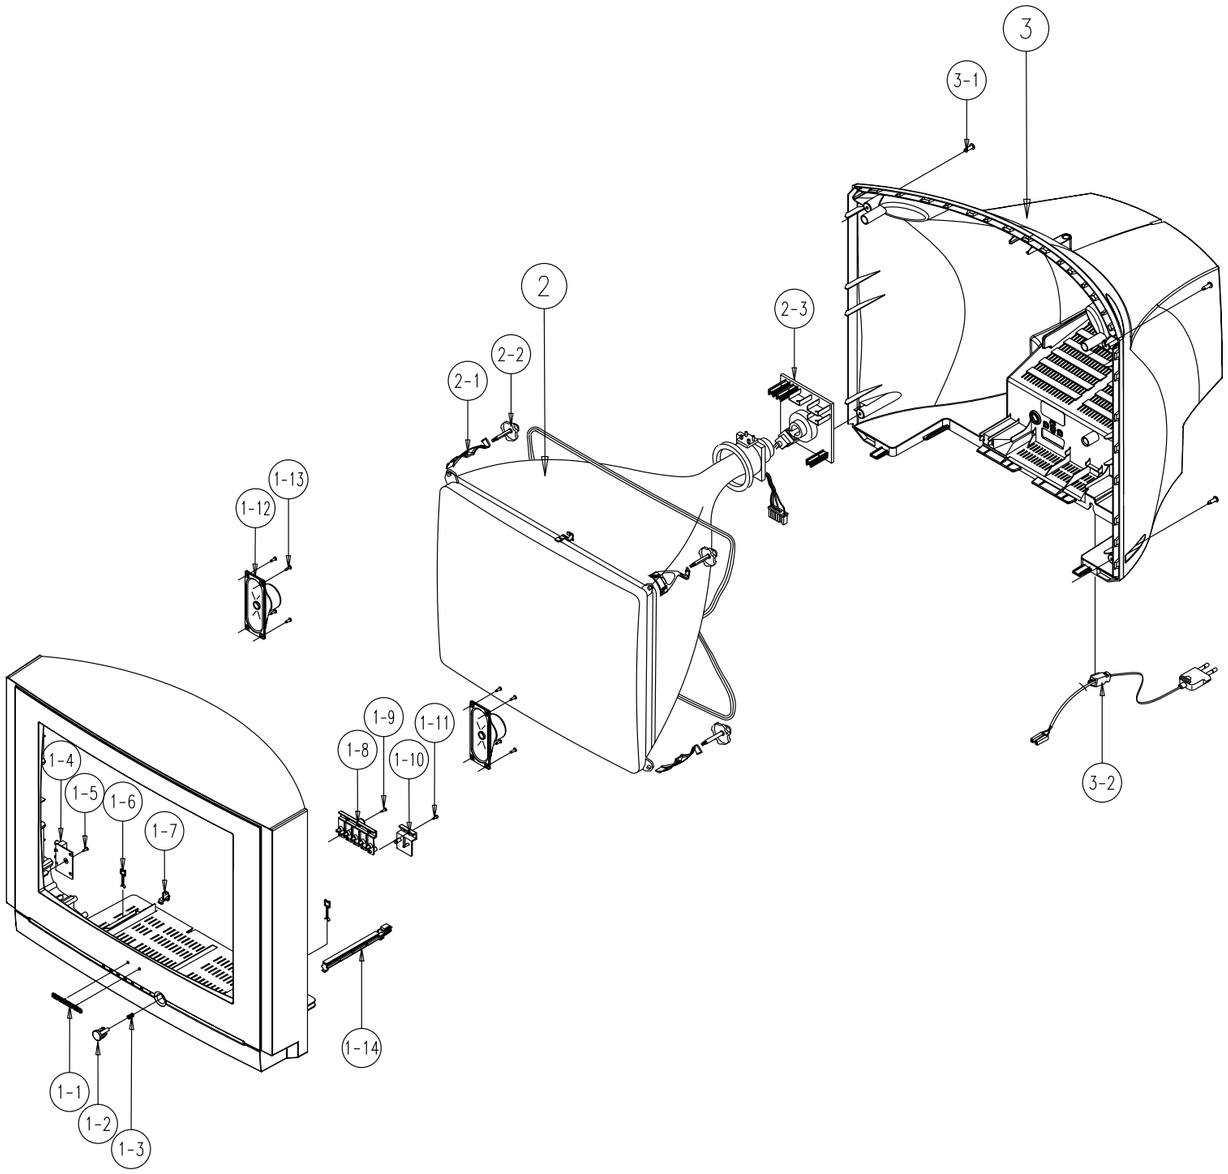

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01295A	ASSY COVER P-FRONT;21V5,HIPS HB,SILVER		1		
1*	AA64-03111A	CABINET-FRONT;21V5,HIPS,HB,G4309,SV012P		1		
1-1	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20		1		
1-2	AA64-03113A	KNOB-POWER;21V5,ABS,HB,G3676,SVM3012		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	AA95-01709A	ASSY ETC-PCB,A/V SIDE;,21D8,KS1A,STEREO		1		
1-5	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	CF+PCB	
1-6	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		
1-7	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-8	AA64-03112A	KNOB-CONTROL;21V5,ABS,HB,G3676,SVM3012		1		
1-9	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	KC+CF	
1-10	AA64-03114A	WINDOW-RMC,LED;21V5,PC,CLR		1		
1-11	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	WR+CF	
1-12	3001-000274	SPEAKER;5W,8OHM,90DB,160HZ		2		
1-13	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	SPK+CF	
1-14	HA61-00721A	HOLDER-RAIL;TOOL,21F5(SEH),-,-,-,-,-,MOL		1		
2	AA94-05859A	ASSY CRT;A51EER31X,+400MG,21		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-02902A	CABINET BACK;21H4(SEH),HIPS,HB		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		

7. Electrical Parts List

7-1 CZ20F32TSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05693A	ASSY PCB MAIN(OPT);CZ501FT,KS1A	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R601	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R421	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	R814	2008-001112	R-FUSIBLE(S);2.4ohm,5%,2W,AG,TP,3.9x12mm	
2	R815	2008-001112	R-FUSIBLE(S);2.4ohm,5%,2W,AG,TP,3.9x12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
⚠ 2	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C615	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
2	R302	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R303	2003-002070	R-METAL OXIDE;1ohm,5%,2W,AF,TP,3.9x10mm	
2	R306	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
⚠ 2	CR409S	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C603	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J162	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	JK01	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	JK02	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	JK03	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	JK04	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
2	IC602	AA96-00848A	ASSY H/S;,SOUND,AA62-30175D,TDA8943	
3	SCR602	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S602	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3	IC602	1201-001740	IC-AUDIO AMP;TDA8943,SIL,9P,850MIL,SINGL	
2	LW01	AA27-40001N	COIL HORIZ. WIDTH;-,90/260uH,SB-5S620,PI	
2	CN601	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	CR402	2306-000195	C-FILM,MPPF;360nF,5%,400V,TP,26x19x11.5,	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

ASSY CRT

1		AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG	
⚠ 2		AA03-00280A	CRT COLOR;A48ECR43X,+380MG,1.85MH,28.7MH	
2		AA27-20003Y	COIL DEGAUSSING;-,20,15.2ohm,28T,L2170,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70031A	ASSY TBC WIRE(P);DP,20,AA98-70014B,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	

ASSY P/MATERIAL

1		AA92-07439A	ASSY P/MATERIAL;20F3	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-01809A	CUSHION SET;20F3,PS FOAMED,C=0.022	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	

ASSY COVER FRONT

1		AA90-04458A	ASSY COVER FRONT;20F3,SEH	
2		AA96-01211A	ASSY COVER P-CAINET FRONT;20F3,HIPS HB,G	
3		AA64-03007A	KNOB-CONTROL;14F3,ABS,HB,G3676,SVM-3012	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA64-03008A	KNOB-POWER;14F3,ABS,HB,G3676,SVM-3012	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA64-03012A	WINDOW-RMC,LED;14F3,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-03019A	CABINET-FRONT;20F3,HIPS,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
3	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	WR+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA96-01188A	ASSY HOLDER SPK;16OHM,3001-001008,AA39-2	
4		AA39-20500G	LEAD CONNECTOR-ASSY;,3(2),67096-003,REC,	
4		3001-001008	SPEAKER;5W,16ohm,90dB,180Hz	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	

ASSY COVER REAR

1		AA90-04457A	ASSY COVER REAR;20F3,SEH	
2		AA64-03020A	CABINET-BACK;20F3,HIPS,HB	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	

ASSY BOX

1		AA92-07232A	ASSY BOX;20F3	
2		AA69-01902A	PACKING CASE;20F3,D-2 BB,A1,560,528,505,	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

REMOCON

1		AA59-00104N	REMOCON;,TM59,SIM806E,29,L/GRAY,TTX/MO	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-2 CZ20F32ZSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05694A	ASSY PCB MAIN(OPT);CZ501FZ,KS1A,ORION	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R602	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R601	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501M	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502M	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	R814	2008-001112	R-FUSIBLE(S);2.4ohm,5%,2W,AG,TP,3.9x12mm	
2	R815	2008-001112	R-FUSIBLE(S);2.4ohm,5%,2W,AG,TP,3.9x12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C615	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
2	R302	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R303	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	R306	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R505	2008-001015	R-FUSIBLE(S);1.5ohm,5%,2W,AF,TP,3.9x10mm	
2	R421	2008-001015	R-FUSIBLE(S);1.5ohm,5%,2W,AF,TP,3.9x10mm	
2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C603	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J162	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	JK01	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	JK02	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	JK03	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	JK04	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-00053A	COIL LINEARITY;-,193uH,DR10X10 C:4.35,7.	
2	IC602	AA96-00848A	ASSY H/S;,SOUND,AA62-30175D,TDA8943	
3	SCR602	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S602	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
3	IC602	1201-001740	IC-AUDIO AMP;TDA8943,SIL,9P,850MIL,SINGL	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
2	CN601	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	CR402S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
⚠ 2	IC201S	AA09-00297A	IC MICOM;TDA9381/N2/3I,SPM-802EEN2,64P,	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

Level	Loc. No.	Code No.	Description ; Specification	Remark

ASSY CRT

1		AA94-05857A	ASSY CRT;A48JLL90X02(W),450MG,20,ITC,O	
⚠ 2		AA03-00258A	CRT COLOR;A48JLL80X01,+380MG,2.3MH,28.0M	
2		AA27-20003Y	COIL DEGAUSSING;-,20,15.2ohm,28T,L2170,E	
2		AA98-70031A	ASSY TBC WIRE(P);DP,20,AA98-70014B,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,YFH806-06,350	

ASSY COVER REAR

1		AA90-04457A	ASSY COVER REAR;20F3,SEH	
2		AA64-03020A	CABINET-BACK;20F3,HIPS,HB	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	

ASSY P/MATERIAL

1		AA92-07439A	ASSY P/MATERIAL;20F3	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-01809A	CUSHION SET;20F3,PS FOAMED,C=0.022	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	

ASSY COVER FRONT

1		AA90-04458A	ASSY COVER FRONT;20F3,SEH	
2		AA96-01211A	ASSY COVER P-CAINET FRONT;20F3,HIPS HB,G	
3		AA64-03007A	KNOB-CONTROL;14F3,ABS,HB,G3676,SVM-3012	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA64-03008A	KNOB-POWER;14F3,ABS,HB,G3676,SVM-3012	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA64-03012A	WINDOW-RMC,LED;14F3,PC,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		AA64-03019A	CABINET-FRONT;20F3,HIPS,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
3	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	WR+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	CF+SPK	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA96-01188A	ASSY HOLDER SPK;16OHM,3001-001008,AA39-2	
4		AA39-20500G	LEAD CONNECTOR-ASSY;,3(2),67096-003,REC,	
4		3001-001008	SPEAKER;5W,16ohm,90dB,180Hz	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	CF+CB	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O	

ASSY BOX

1		AA92-07232A	ASSY BOX;20F3	
2		AA69-01902A	PACKING CASE;20F3,D-2 BB,A1,560,528,505,	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

REMOCON

1		AA59-00104J	REMOCON;,TM59,SIM806E,24,L/GRAY,EX,GRA	

ASSY POWER CORD

⚠ 1	P/CORD	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP-,-,-,BLK,VO,KE-002	

7-3 CZ20F42ZSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05658A	ASSY PCB MAIN(OPT);CZ20H1H3Z,KS1A,ORION	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501M	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502M	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	R814	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	R815	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
⚠ 2	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	R306	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	C615	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R302	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R303	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	R505	2008-001015	R-FUSIBLE(S);1.5ohm,5%,2W,AF,TP,3.9x10mm	
2	R421	2008-001015	R-FUSIBLE(S);1.5ohm,5%,2W,AF,TP,3.9x10mm	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C603	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;90HM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-00053A	COIL LINEARITY;-,193uH,DR10X10 C:4.35,7.	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	IC602	AA96-00848A	ASSY H/S;,SOUND,AA62-30175D,TDA8943	
3	SCR602	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S602	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
3	IC602	1201-001740	IC-AUDIO AMP;TDA8943,SIL,9P,850MIL,SINGL	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
2	CN703	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
2	CN603	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	IC201S	AA09-00297A	IC MICOM;TDA9381/N2/3I,SPM-802EEN2,64P,	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CRT	
1		AA94-05857A	ASSY CRT;A48JLL90X02(W),450MG,20,ITC,O	
⚠ 2		AA03-00258A	CRT COLOR;A48JLL80X01,+380MG,2.3MH,28.0M	
2		AA27-20003Y	COIL DEGAUSSING;-,20,15.2ohm,28T,L2170,E	
2		AA98-70031A	ASSY TBC WIRE(P);DP,20,AA98-70014B,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,YFH806-06,350	
			ASSY ACCESSORY	
1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
			ASSY PACKING	
1		AA90-01156A	ASSY PACKING;20F4	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-00646A	CUSHION-SET;CUSHION SET;20F4,CAST	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		HA69-00710B	PACKING CASE;20F4,CB D-1 BB,YEL,GUJU EUR	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	
			ASSY CABINET FRONT	
1		HA91-00889A	ASSY CABINET FRONT;20F4,SV-011P-II	
2	KC+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	SPK+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
2		AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-02491A	KNOB POWER;20H3,HIPS,HB,BLK	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		HA64-01339A	WINDOW-REMOCON;WINDOW-REMOCON;20H3,PC,VI	
3		HA83-00009A	LP-RESIN PC;,LEXAN 121R,VIOLET	
2		HA64-01340A	INDICATOR-LED;INDICATOR-LED;20H3,ACRYL,	
3		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
2		AA64-02452A	KNOB CONTROL;20H3,HIPS,HB,BLK	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		AA64-02396A	CABINET-FRONT;20F4,HIPS,HB,SV-012P-II,GR	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
2		AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3	
3		3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
			ASSY-CABINET(COM)	
1		AA90-01056C	ASSY-CABINET(COM);VL-1823,20F4	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		HA64-02382B	CABINET BACK;20F4,VL-1823,GRY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA60-00140A	SPACER-GUM;SPACE	
2	CF+AV	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
			ASSY ETC	
1		AA95-01478A	ASSY ETC;,20F4,KS1A	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02A	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-00208C	PCB-FRONT AV;S4/C5 MODEL,FR-1,1L,C,1.6T,	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JR01	3722-001282	JACK-PIN;2P(3P),3.2mm,AU,BLK,-	
2	CN702	AA39-20112E	LEAD CONNECTOR-ASSY;,9P,YBNH025-09,67096	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
			ASSY ETC-A/V SIDE	
1		AA95-00946A	ASSY ETC-A/V SIDE;-,20F4,S15A,PAL,-,MONO	
2		HA61-00494A	HOLDER-AV;TOOL,20F4,-,-,-,-,MOLD	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
2		AA64-01309K	INLAY AV;PS SHEET,21D8,T0.3,-,-,-,S15A M	
2	PCB+HO	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	C/F+HO	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	
			REMOCON	
1		AA59-00104J	REMOCON;,TM59,SIM806E,24,L/GRAY,EX,GRA	
			ASSY POWER CORD	
⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-4 CZ20H12TSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-05657A	ASSY PCB MAIN(OPT);CZ20H1H3T,KS1A	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R303	2003-002070	R-METAL OXIDE;1ohm,5%,2W,AF,TP,3.9x10mm	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R421	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	R814	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	R815	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
⚠ 2	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
⚠ 2	CR409S	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
2	R302	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	C615	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
2	R306	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C603	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000195	C-FILM,MPPF;360nF,5%,400V,TP,26x19x11.5,	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	IC602	AA96-00848A	ASSY H/S;,SOUND,AA62-30175D,TDA8943	
3	SCR602	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S602	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
3	IC602	1201-001740	IC-AUDIO AMP;TDA8943,SIL,9P,850MIL,SINGL	
2	LW01	AA27-40001N	COIL HORIZ. WIDTH;-,90/260uH,SB-5S620,PI	
2	CN703	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
2	CN603	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CRT	
1		AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG	
⚠ 2		AA03-00280A	CRT COLOR;A48ECR43X,+380MG,1.85MH,28.7MH	
2		AA27-20003Y	COIL DEGAUSSING;-,20,15.2ohm,28T,L2170,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70031A	ASSY TBC WIRE(P);DP,20,AA98-70014B,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	
			ASSY ETC	
1		HA95-01477A	ASSY ETC;KS1A,A/V FRONT	
2	CN702	AA39-20112E	LEAD CONNECTOR-ASSY;,9P,YBNH025-09,67096	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001024	FLUX;DF-98TVS,-,20%,-	
2		0204-000442	SOLVENT;1M-1000,C3H70H,96,-	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JA702	3722-000506	JACK-PIN;2P,3.6mm,-,AG	
2	RE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE06	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JE02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JE04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	RE05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	JE03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-10903B	PCB-A/V FRONT;S15A,1L,FR-1,245x245x1.6T,	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
			ASSY ACCESSORY	
1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
			ASSY PACKING	
1		AA90-01105B	ASSY PACKING;20H1	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-20517B	CUSHION-SET;CT20H1,PS,C=0.02,-,-,-,-	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		HA69-00008B	PACKING-CASE;20H1,SEH,CB D-1,YEL,-,-,-	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	
			ASSY CABINET FRONT	
1		HA91-00873B	ASSY CABINET FRONT;20H1,SV-011P-II	
2	KC+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	SPK+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,	
2		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-02490B	KNOB POWER;20H1,HIPS,HB,SV-012P-II,GRY	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA64-40527A	WINDOW-REMOCON;-,21H1,-,PC,-,-,-	
2		AA64-40496A	INDICATOR-LED;-,ACRYL,-,-,-,-,-	
2		AA64-02441B	KNOB CONTROL;20H1,HIPS,HB,SV-012P-II,GRY	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3	
3		3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
2		AA64-02359B	CABINET-FRONT;20H1,HIPS,HB,SV-012P-II,GR	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
			ASSY-CABINET(COM)	
1		AA90-01054D	ASSY-CABINET(COM);SILVER,VL-1823,SET 20H	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	PA+CF	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		HA64-02378B	CABINET-BACK;21H1,VL-1823,GRAY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA63-00079A	RUBBER-WASHER;RUBBER-WASHER;SHROR-60,20X	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
			REMOCON	
1		AA59-00104N	REMOCON;,TM59,SIM806E,29,L/GRAY,TTX/MO	
			ASSY POWER CORD	
⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-5 CZ20H42TSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-12346A	ASSY PCB MAIN(OPT);CZ20H4T,KS1A	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R619	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R605	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);27OOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R303	2003-002070	R-METAL OXIDE;1ohm,5%,2W,AF,TP,3.9x10mm	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R421	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C603	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C607	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C619	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
⚠ 2	CR409S	2201-002041	C-CERAMIC,DISC;0.82nF,10%,2kV,Y5P,TP,9x5	
2	R302	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	R306	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C606	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C610	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	R601	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R607	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R814	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R815	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J123	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000195	C-FILM,MPPF;360nF,5%,400V,TP,26x19x11.5,	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	IC601	AA96-00923A	ASSY H/S;,AUDIO,AA62-00064A,TDA8944,BRK	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		1201-001741	IC-AUDIO AMP;TDA8944J,DBS,17P,937MIL,DUA	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA61-10162B	BRACKET-IC;-,SBHG-1,T1.0,-,-,-,100	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
2	LW01	AA27-40001N	COIL HORIZ. WIDTH;-,90/260uH,SB-5S620,PI	
2	CN703	3711-000628	CONNECTOR-HEADER;BOX,11P,1R,2.5MM,STRAIG	
2	CN602	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
⚠ 2	D806	AA96-00922A	ASSY H/S;,BRIDGE,AA62-00065A,D06U20S,KS	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		0402-001374	DIODE-RECTIFIER;FFPF06U20S,200V,6A,TO-22	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	

ASSY CRT

1		AA94-05856A	ASSY CRT;A48ECR43X,+400MG,20,90DEG	
⚠ 2		AA03-00280A	CRT COLOR;A48ECR43X,+380MG,1.85MH,28.7MH	
2		AA27-20003Y	COIL DEGAUSSING;-,20,15.2ohm,28T,L2170,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70031A	ASSY TBC WIRE(P);DP,20,AA98-70014B,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY ETC-A/V SIDE

1		AA95-03104A	ASSY ETC-A/V SIDE;,21D8,KS1A	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02A	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-00567A	PCB-SIDE AV;CS21D8,FR-1,1L,A,1.6T,245X24	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JR01	3722-001282	JACK-PIN;2P(3P),3.2mm,AU,BLK,-	
2	CN702	AA39-20461C	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,6709	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	

ASSY P/MATERIAL

1		AA92-07108A	ASSY P/MATERIAL;20H4,BWT	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-01684A	CUSHION SET;20H4,PS FOAMED,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	

ASSY COVER FRONT

1		AA90-04276A	ASSY COVER FRONT;20H4	
2		AA96-01168A	ASSY COVER P-C/FRONT;20H4,HIPS HB	
3	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	SPK +C	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	WR+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03235A	KNOB-CONTROL;20H4,ABS,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
3		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		AA64-03233A	KNOB-POWER;20H4,ABS,HB,NO-SILK	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
3		AA64-03231A	CABINET-FRONT;20H4,HIPS,HB	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
3		AA64-03237A	WINDOW-RMC,LED;20H4,ACRYL,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		3001-000274	SPEAKER;5W,8OHM,90DB,160HZ	
3		HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA64-01309K	INLAY AV;PS SHEET,21D8,T0.3,-,-,-,S15A M	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2	crt	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2	CR+AV	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	QMS	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	RATING	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	

ASSY COVER REAR

1		AA90-04278A	ASSY COVER REAR;20H4	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		AA64-02904A	CABINET BACK;20H4(SEH),HIPS,HB	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	

ASSY BOX

1		AA92-07106C	ASSY BOX;20H4	
2		AA69-01735C	PACKING CASE;20H4,D-1,A1,YEL,SEH(LOCAL)	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

ASSY LABEL

1		AA92-07110B	ASSY LABEL;20H4,XEC,KS1A	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2		HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	

REMOCON

1		AA59-00104N	REMOCON;,TM59,SIM806E,29,L/GRAY,TTX/MO	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-6 CZ21F52TSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-12417A	ASSY PCB MAIN(OPT);CZ21F5T,KS1A	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R303	2008-001133	R-FUSIBLE(S);0.75ohm,5%,2W,AF,TP,3.9x10m	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C105	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	R814	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	R815	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
2	R421	2008-000254	R-FUSIBLE(S);0.68ohm,5%,2W,AF,TP,3.9x10m	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	C615	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	R302	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R306	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	C603	2301-000247	C-FILM,PEF;33nF,5%,50V,TP,8.1x4.5x13mm,5	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	R315	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	R316	2003-001018	R-METAL OXIDE(S);220ohm,5%,2W,AF,TP,3.9x	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000350	C-FILM,MPPF;270NF,5%,400V,TP,26X18.5X10M	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	IC602	AA96-00848A	ASSY H/S;,SOUND,AA62-30175D,TDA8943	
3	SCR602	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S602	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
3	IC602	1201-001740	IC-AUDIO AMP;TDA8943,SIL,9P,850MIL,SINGL	
2	CN703	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
2	CN603	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

Level	Loc. No.	Code No.	Description ; Specification	Remark
			ASSY CRT	
1		AA94-11633A	ASSY CRT;,+450MG,21,ITC,A51EFS83X191,9	
⚠ 2		AA03-00354A	CRT COLOR;A51EFS83X191,450MG,2.0MH,23.0M	
2		AA27-20003Z	COIL DEGAUSSING;-,21,13.5ohm,25T,L2380,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70030A	ASSY TBC WIRE(P);DP,21,AA98-70014C,1P,TV	
2		AA65-30113A	CLAMPER CORE-D,COIL;-,NYLON 66,V2,-,BLK,	
2		AA39-20518A	LEAD CONNECTOR-ASSY;,6(4)P,YFH806-06,350	
			ASSY ETC	
1		AA95-01478A	ASSY ETC;,20F4,KS1A	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02A	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-00208C	PCB-FRONT AV;S4/C5 MODEL,FR-1,1L,C,1.6T,	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JR01	3722-001282	JACK-PIN;2P(3P),3.2mm,AU,BLK,-	
2	CN702	AA39-20112E	LEAD CONNECTOR-ASSY;,9P,YBNH025-09,67096	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
			ASSY ACCESSORY	
1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	
			ASSY PACKING	
1		AA90-01113A	ASSY PACKING;21F5	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-00908B	CUSHION-SET;21F5,EPS C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		HA69-00967A	PACKING-CASE;21F5,CB D-2 BB,YEL,KS1A SEH	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	
			ASSY CABINET FRONT	
1		HA91-00834A	ASSY CABINET FRONT;21F5,KS0A,HIPS,HB,SV	
2	CF+RMC	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+SPK	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CF+KC	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
2		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-01705C	KNOB POWER;21F5,HIPS,HB,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA64-01706B	WINDOW-RMC,LED;21F5,ACRYL,CLEAR	
3		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
2		AA64-02471A	KNOB CONTROL;21F5,HIPS,HB,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		AA64-02383A	CABINET-FRONT;21F5,HIPS,HB,SV-012P-II,GR	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
2		AA96-00852A	ASSY SPEAKER;,16OHM,3W,3001-001039,700/3	
3		3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
2		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
2		HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
			ASSY-CABINET(COM)	
1		AA90-01068B	ASSY-CABINET(COM);KS1A,VL-1823,21F5	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2	CC	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		HA64-02356B	CABINET BACK;21F5,VL-1823,GRY	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
			ASSY ETC-A/V SIDE	
1		AA95-00946A	ASSY ETC-A/V SIDE;-,20F4,S15A,PAL,-,MONO	
2		HA61-00494A	HOLDER-AV;TOOL,20F4,-,-,-,-,MOLD	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
2		AA64-01309K	INLAY AV;PS SHEET,21D8,T0.3,-,-,-,S15A M	
2	PCB+HO	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	C/F+HO	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	
			REMOCON	
1		AA59-00104N	REMOCON;,TM59,SIM806E,29,L/GRAY,TTX/MO	
			ASSY POWER CORD	
⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-7 CZ21H42TSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-12353A	ASSY PCB MAIN(OPT);CZ21D8T,KS1A	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ901	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q704	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q701	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R619	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R709	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;910HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R723	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R721	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R220	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R605	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R724	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R725	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R726	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R727	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;470HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;470HM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R713	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R722	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R303	2008-001133	R-FUSIBLE(S);0.75ohm,5%,2W,AF,TP,3.9x10m	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	C904	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
2	C501	2201-000192	C-CERAMIC,DISC;0.01NF,0.25PF,500V,C0G,TP	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
⚠ 2	CR409S	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C105	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C226	2202-000829	C-CERAMIC,MLC-AXIAL;0.82NF,10%,50V,Y5P,T	
2	C707	2301-000204	C-FILM,PEF;2.7nF,5%,50V,TP,7.4x3.9x13mm,	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C227	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C603	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C607	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C619	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C212	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C705	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C706	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C710	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C711	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C206	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C709	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C214	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	L902	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L904	2701-000180	INDUCTOR-AXIAL;33uH,5%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L706	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	PCB	AA41-00131G	PCB-MAIN;CS2139,FR-1,1L,G,1.6T,245X245,K	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	R421	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	Z203	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	J101	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
2	R302	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	C203	2401-002462	C-AL;33uF,20%,16V,GP,TP,5x11,5	
2	R306	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	R728	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2		0203-001123	TAPE-PAPER;#53131,T0.15,W6.0,L200000,YEL	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	DZ401	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	C606	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C610	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	R601	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R607	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R814	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R815	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J111	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J142	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R717	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R701	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J117	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J179	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R708	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J123	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-001063	FILTER-SAW AV;38.9MHz,SIP5K,TP,18.5dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000350	C-FILM,MPPF;270NF,5%,400V,TP,26X18.5X10M	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	IC601	AA96-00923A	ASSY H/S;,AUDIO,AA62-00064A,TDA8944,BRK	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		1201-001741	IC-AUDIO AMP;TDA8944J,DBS,17P,937MIL,DUA	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA61-10162B	BRACKET-IC;-,SBHG-1,T1.0,-,-,-,100	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	
2	CN703	3711-000628	CONNECTOR-HEADER;BOX,11P,1R,2.5MM,STRAIG	
2	CN602	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	

Level	Loc. No.	Code No.	Description ; Specification	Remark
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	
⚠ 2	D806	AA96-00922A	ASSY H/S;,BRIDGE,AA62-00065A,D06U20S,KS	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		0402-001374	DIODE-RECTIFIER;FFPF06U20S,200V,6A,TO-22	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	

ASSY CRT

1		AA94-05859A	ASSY CRT;A51EER31X,+400MG,21	
⚠ 2		AA03-00279A	CRT COLOR;A51EER33X,+380MG,2.07MH,21.0MH	
2		AA27-20003Z	COIL DEGAUSSING;-,21,13.5ohm,25T,L2380,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70030A	ASSY TBC WIRE(P);DP,21,AA98-70014C,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY ETC-A/V SIDE

1		AA95-03104A	ASSY ETC-A/V SIDE;,21D8,KS1A	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02A	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-00567A	PCB-SIDE AV;CS21D8,FR-1,1L,A,1.6T,245X24	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JR01	3722-001282	JACK-PIN;2P(3P),3.2mm,AU,BLK,-	
2	CN702	AA39-20461C	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,6709	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	

ASSY P/MATERIAL

1		AA92-07109A	ASSY P/MATERIAL;21H4,BWT	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-01683A	CUSHION SET;21H4,PS FOAMED,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	

ASSY COVER FRONT

1		AA90-04277A	ASSY COVER FRONT;21H4	
2		AA96-01169A	ASSY COVER P-C/FRONT;21H4,HIPS HB	
3	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	SPK+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	WR+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03236A	KNOB-CONTROL;21H4,ABS,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
3		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
3		AA64-03234A	KNOB-POWER;21H4,ABS,HB,NO-SILK	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
3		AA64-03232A	CABINET-FRONT;21H4,HIPS,HB	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
4		HA83-00069A	LP-MARKING PAINT;,DARK GREY,SV-704P	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
3		AA64-03238A	WINDOW-RMC,LED;21H4,ACRYL,CLR	
4		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
3		3001-000274	SPEAKER;5W,8OHM,90DB,160HZ	
3		HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA64-01309K	INLAY AV;PS SHEET,21D8,T0.3,-,-,-,S15A M	
3		0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2	crt	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2	CR+AV	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2	RATING	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	QMS	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		HA60-00140A	SPACER-GUM;SPACE	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	

ASSY COVER REAR

1		AA90-04279A	ASSY COVER REAR;21H4	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2		AA64-02902A	CABINET BACK;21H4(SEH),HIPS,HB	
3		AA63-60001L	SPACER-FELT;-,FELT,-,-,-,BLK,T0.35,-,150	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	

REMOCON

1		AA59-00104N	REMOCON;,TM59,SIM806E,29,L/GRAY,TTX/MO	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

7-8 CZ21S43NSXXEH

ASSY PCB MAIN

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-12488A	ASSY PCB MAIN;CZ21S43NSXXEH,21S4,XEH,KS1	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ901	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R619	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R826	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R117	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R605	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R712	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R601	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R607	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R837	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R838	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R839	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R814	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R815	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
⚠ 2	CR409S	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C105	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C610	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C904	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C707	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C603	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C607	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C121	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C619	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C119	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C120	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C203	2401-001176	C-AL;33uF,20%,25V,GP,TP,5x11,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C214	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C825	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	J142	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L701	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	Z203	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	PCB	AA41-00131H	PCB-MAIN;CS21D8,FR-1,1L,H,1.6T,245X245,K	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R302	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2008-001133	R-FUSIBLE(S);0.75ohm,5%,2W,AF,TP,3.9x10m	
2	R306	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
2	R421	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	C104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J123	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J141	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J191	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J213	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J214	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J705	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	CN705A	AA95-03087A	ASSY SUB-PCB NICAM;CZ21S4,STEREO	
3	ICS02	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
3	RS02	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS03	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS06	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS07	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS01	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS14	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS08	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS09	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	CS26	2201-000112	C-CERAMIC,DISC;1.5NF,10%,50V,Y5V,TP,5X3.	
3	CS01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
3	CS29	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
3	CS30	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
3	CS20	2201-000472	C-CERAMIC,DISC;0.33nF,5%,50V,SL,TP,8.5x3	
3	CS22	2201-000472	C-CERAMIC,DISC;0.33nF,5%,50V,SL,TP,8.5x3	
3	CS07	2201-000982	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,4	
3	CS27	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	CS28	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
3	CS09	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
3	CS35	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
3	CS15	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
3	CS17	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
3	CS23	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
3	CS19	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
3	CS21	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
3	CS24	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CS12	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS13	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS14	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS11	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS06	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	CS18	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	CS16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	CS25	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	CS03	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
3	LS03	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
3	LS01	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
3	LS04	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
3	XS01	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
3	JS01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	PCB	AA41-00139A	PCB-STEREO/LINE-ST/MTS-M;DREAM-1,1L,FR-1	
3	ICS01	1204-001775	IC-SOUND PROCESSOR;MSP3410D-C5 9458 ,SDI	
3	CN706	3711-002706	CONNECTOR-HEADER;NOWALL,8P,1R,2.5mm,ANGL	
3	CN705	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
3	CN707	AA39-00276A	LEAD CONNECTOR-ASSY;,UL1185#26,UL/CSA,6P	
3	CN702	AA39-00095A	LEAD CONNECTOR-ASSY;,3(2)P,YBNH250-03,35	
3		AA98-00253A	ASSY SUB PART;KS1A,NICAM MODULE	
4		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
4		0204-001095	THINNER;#4520,-,-,-	
4		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-000302	FILTER-SAW AV;38.9MHz,SIP5K,ST,15.4dB,B/	
⚠ 2	SF102S	2904-001224	FILTER-SAW AV;38.9MHz,SIP5K,ST,16.3dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000350	C-FILM,MPPF;270NF,5%,400V,TP,26X18.5X10M	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	T101	AA26-00025A	TRANS RF;7MG,-,-,-,10pF,-,58.35MHz,7.7x	
2	IC601	AA96-00923A	ASSY H/S;,AUDIO,AA62-00064A,TDA8944,BRK	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		1201-001741	IC-AUDIO AMP;TDA8944J,DBS,17P,937MIL,DUA	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA61-10162B	BRACKET-IC;-,SBHG-1,T1.0,-,-,-100	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-	
⚠ 2	D806	AA96-00922A	ASSY H/S;,BRIDGE,AA62-00065A,D06U20S,KS	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		0402-001374	DIODE-RECTIFIER;FFPF06U20S,200V,6A,TO-22	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	
2	IC101	1204-001583	IC-IF CIRCUIT;U4468B,DIP,16P,-,PLASTIC,5	
2	CN701	3711-000628	CONNECTOR-HEADER;BOX,11P,1R,2.5MM,STRAIG	
2	CN602	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	CN707A	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
2	Q803	0502-000242	TR-POWER;KSA614,PNP,25W,TO-220,TP,40-24	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

ASSY-CABINET,FRONT

1		HA91-05281A	ASSY-CABINET,FRONT;21S4,KS1A,HIPS,HB	
2	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	SPK +C	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2	TWISTE	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
2		HA64-00709C	KNOBCONTROL;21S4,ABS,HB,SEH	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
2		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
2		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		AA64-00711D	KNOB POWER;21S4,ABS,HB,SEH	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00007A	LP-RESIN;,M BATCH,WILSON 902-BK-60,BLK	
2		AA64-00706P	CABINET-FRONT;21S4,HIPS,HB,SEH,KS1A	
3		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		HA83-00021A	LP-MARKING PAINT;,WHITE,TPC180	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
2		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
2		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
2		AA64-00713C	WINDOW REMOCON;21S4,PC,V0,SEH	
3		HA83-00009A	LP-RESIN PC;,LEXAN 121R,VIOLET	
2		AA64-00714C	INDICATOR LED;21S4,ACRYL,CLR,SEH	
3		HA83-00010A	LP-RESIN;,OROGLAS,VM-100 ZHN 2	
2		AA63-00206P	COVER-CONTROL;21S4,MONO,HIPS,HB,GD-906P,	
3		HA83-00034A	LP-MARKING PAINT;,METALLIC-CHAMPAGNE,GD-	
3		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
3		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	
2		3001-001088	SPEAKER;5W,8OHM,90DB,250HZ+-50HZ	
2		3001-001115	SPEAKER;15W,8OHM,93DB,110	
2		AA39-00228A	LEAD CONNECTOR-ASSY;,4P/4.7UF,YSH250-04,	
2		AA63-00274A	GRILLE-WOOFER,L;21S4,-,-,-,-,-,-,63-0020	
2		AA63-00275A	GRILLE WOOFER-R;21S4,-,-,-,-,-,-,63-0020	

ASSY-CABINET(COM)

1		AA90-03626B	ASSY-CABINET(COM);KS1A,VL-1823,21S4	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		HA64-00707J	CABINETBACK;21S4,VL-1823,SEH	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	rating	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	CF+PCB	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
2		AA63-00603A	COVER-AV;21S4,HIPS,HB,G4309,SV012P+W971	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	

ASSY CRT

1		AA94-05859A	ASSY CRT;A51EER31X,+400MG,21	
⚠ 2		AA03-00279A	CRT COLOR;A51EER33X,+380MG,2.07MH,21.0MH	
2		AA27-20003Z	COIL DEGAUSSING;-,21,13.5ohm,25T,L2380,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70030A	ASSY TBC WIRE(P);DP,21,AA98-70014C,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY ETC-A/V FRONT

1		AA95-03067A	ASSY ETC-A/V FRONT;,21S4,KS1A,STEREO	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE05	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE08	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CE02	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE05	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	LE02	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	PCB	AA41-00568A	PCB-FRONT AV;S4/C5,FR-1,1L,A,1.6T,245X24	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	JR01	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN702	AA39-20461C	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,6709	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
2	CN704A	AA39-00094A	LEAD CONNECTOR-ASSY;,3(2)P,YBNH250-03,35	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

REMOCON

1		AA59-00104K	REMOCON;-,TM59,DREAM,29,L/GRAY,PAL-TTX	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	

ASSY PACKING

1		AA90-03627A	ASSY PACKING;21S4	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		HA69-00309C	CUSHION-SET;21S4,PS C=0.02,SEH	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	
2		HA69-00312K	PACKING CASE;21S4,D-2 BB,YEL,CIS PROGUNI	
2		AA69-00744E	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1300,H1	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

7-9 CZ21V53NSXXEH

ASSY PCB MAIN(OPT)

Level	Loc. No.	Code No.	Description ; Specification	Remark
1		AA94-07269A	ASSY PCB MAIN(OPT);CZ21D8W,KS1A,EAST EUR	
2		HA68-02176A	LABEL;LABEL	
2	D201	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D811	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 2	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
2	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
⚠ 2	D803	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
2	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
2	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,	
⚠ 2	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-20	
⚠ 2	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
⚠ 2	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
2	D302	0402-001352	DIODE-RECTIFIER;GUF15G-20A,400V,1.5A,DO-	
⚠ 2	D805	0402-001470	DIODE-RECTIFIER;RU2BV1,800V,1A,DO-204AC,	
2	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ807	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ810	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
2	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ803	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,1W,DO-41,T	
2	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ204	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ701	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ702	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ703	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ704	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
2	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
2	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
2	DZ806	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500mW,DO	
2	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
2	DZ901	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ906	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ907	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ908	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
2	DZ203	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500mW,DO	
2	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
2	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
2	Q201	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q901	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
2	Q402	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
2	Q202	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q205	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q903	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
2	Q905	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 2	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
2	R207	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R905	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R906	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
2	R218	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R205	2001-000011	R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	J125	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R301	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
2	R618	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R619	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R843	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R823	2001-000037	R-CARBON(S);33OOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R923	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	J137	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R213	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R215	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R223	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R718	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R230	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R826	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R919	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R920	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R921	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R922	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R117	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R918	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R926	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R916	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R917	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R206	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R929	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R602	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R605	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R841	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R209	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R204	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R210	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R712	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R715	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	R601	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R607	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R110	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R915	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
2	R702	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R719	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R720	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R225	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
2	R408	2001-001037	R-CARBON(S);0.39OHM,5%,1/2W,AA,TP,2.4X6.	
2	R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R831	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R806	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
2	R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R405	2001-001116	R-CARBON(S);27OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	R840	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP,2.4X6.4	
2	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA,TP,2.4X6.	
2	R501H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R502H	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
2	R503	2002-001008	R-COMPOSITION;1.8Kohm,10%,1/2W,AA,TP,3.7	
⚠ 2	RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 2	RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
2	R827	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R315	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R316	2003-000652	R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
2	R403	2003-000784	R-METAL OXIDE(S);7.5Kohm,5%,2W,AF,TP,4x1	
2	R413	2003-001035	R-METAL OXIDE(S);27ohm,5%,2W,AF,TP,3.9x1	
2	R834	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
2	R837	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R838	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R839	2003-002064	R-METAL OXIDE;7.5ohm,5%,2W,AF,TP,10x3.9m	
2	R801	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
2	R402	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
2	R407	2003-002209	R-METAL OXIDE(S);47Kohm,5%,2W,AG,TP,3.9X	
2	R814	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R815	2003-002228	R-METAL OXIDE(S);0.47ohm,5%,2W,AG,TP,3.9	
2	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
2	R423	2004-001373	R-METAL(S);100Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R424	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R219	2004-001914	R-METAL;39Kohm,2%,1/8W,AA,TP,1.8x3.5mm	
2	R817	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
2	R304	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R305	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
2	R825	2008-000266	R-FUSIBLE(S);1ohm,5%,2W,AF,TP,3.9x10mm	
2	R824	2008-000294	R-FUSIBLE(S);33ohm,5%,2W,AF,TP,3.9x10mm	
2	R505	2008-001011	R-FUSIBLE(S);0.18ohm,10%,2W,AF,TP,3.9x10	
2	R420	2008-001110	R-FUSIBLE(S);68ohm,5%,2W,AG,TP,3.9X12mm	
2	RW701	2011-001133	R-NETWORK;33K/24K/75x3,5%,1/8W,X,SIP,6P,	
2	C302	2201-000259	C-CERAMIC,DISC;0.18NF,10%,500V,Y5P,TP,5.	
2	C303	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C305	2201-000556	C-CERAMIC,DISC;0.47nF,10%,500V,Y5P,TP,5.	
2	C908	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C909	2201-000573	C-CERAMIC,DISC;0.047NF,5%,50V,C0G,TP,5X3	
2	C408	2201-000599	C-CERAMIC,DISC;0.56nF,10%,500V,Y5P,TP,5.	
⚠ 2	CR404S	2201-000639	C-CERAMIC,DISC;0.68nF,10%,2kV,Y5P,TP,9x5	
2	C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
2	C811	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C814	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
⚠ 2	CR409S	2201-000991	C-CERAMIC,DISC;0.56nF,10%,2kV,Y5P,TP,7.5	
2	C701	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C703	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C704	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	C105	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C106	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C111	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
2	C702	2202-000210	C-CERAMIC,MLC-AXIAL;270pF,10%,50V,Y5P,TP	
2	C102	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
2	C115	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C211	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C911	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
2	C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
2	C505	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
2	C502	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
2	C109	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C804	2301-000224	C-FILM,PEF;22nF,5%,50V,TP,7.4x3.9x13mm,5	
2	C805	2301-000235	C-FILM,PEF;3.9nF,5%,50V,TP,6.5x3.0x5.5mm	
2	C309	2301-000254	C-FILM,PEF;39nF,5%,50V,TP,7.5x3.5x6.5mm,	
2	C606	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C610	2301-000289	C-FILM,PEF;5.6nF,5%,50V,TP,7x6x3,5	
2	C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
2	C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C904	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
2	C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C707	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
2	C420	2301-001065	C-FILM,MPPF;47nF,5%,630V,TP,19x15.5x7,7.	
2	C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
2	C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
2	C215	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C216	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C233	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C603	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C607	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C611	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
2	C613	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
⚠ 2	CR405S	2305-000382	C-FILM,MPEF;4.7nF,5%,400V,TP,-,5mm	
2	C121	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C207	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C901	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
2	C103	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C204	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C205	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C208	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C210	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C218	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C230	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C231	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C618	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C619	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C803	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C819	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C913	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
2	C225	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
2	C119	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C120	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
2	C812	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
2	C817	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C823	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C915	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
2	C307	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C308	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
2	C506	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
2	C612	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C820	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
2	C403	2401-000560	C-AL;1uF,20%,160V,GP,TP,6.3x11,5	
2	C219	2401-000603	C-AL;1uF,20%,50V,GP,TP,5x11,5	
2	C221	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C604	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C605	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
2	C822	2401-000711	C-AL;2200uF,20%,25V,GP,TP,16x25,7.5	
2	C222	2401-000758	C-AL;220nF,20%,50V,GP,TP,5x11,5	
2	C827	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
2	C110	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
2	C101	2401-001101	C-AL;330uF,20%,16V,GP,TP,8x11.5,5	
2	C203	2401-001176	C-AL;33uF,20%,25V,GP,TP,5x11,5	
2	C802	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
2	C504	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
2	C209	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C213	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C214	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C229	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C903	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C910	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	C601	2401-001998	C-AL;1000uF,20%,25V,GP,TP,10x20,5mm	
2	C220	2401-002235	C-AL;10uF,20%,16V,GP,TP,5x11mm,5mm	
2	C304	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
2	C306	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	C813	2401-002290	C-AL;47uF,20%,160V,GP,TP,13x20,5	
2	C406	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
2	C818	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C821	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	C825	2401-003028	C-AL;100uF,20%,25V,WT,TP,6.3x11,5	
2	L103	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	J142	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
2	L301	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L302	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L404	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
2	L903	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	L102	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L201	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L205	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L405	2701-000159	INDUCTOR-AXIAL;22uH,10%,4.2x9.8mm	
2	L104	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
2	L101	2701-000171	INDUCTOR-AXIAL;330nH,10%,2.5x3.4mm	
2	L204	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L701	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L702	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L703	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L704	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
2	L804	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	L807	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
2	X901	2801-003937	CRYSTAL-UNIT;12MHz,25ppm,28-AAM,30pF,30o	
⚠ 2	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L806	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	L808	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
2	Z202	2903-000181	FILTER-CERAMIC;BR,5.5MHz,-,-,-,TP,TPS5.5	
2	Z203	2903-001040	FILTER-CERAMIC;TR,5.5/6.0/6.5MHz,-,1dB,-	
2	J910	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L802	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	L803	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
2	SW901	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW902	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW903	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW904	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
2	SW905	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
⚠ 2	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
⚠ 2	FD801S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
2	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
2	HIC01	AA13-20004W	IC HYBRID;-,PAP103T,SIP,6P,PRE-AMP,TP	
2	PCB	AA41-00131H	PCB-MAIN;CS21D8,FR-1,1L,H,1.6T,245X245,K	
2	EY101	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY401	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY402	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY403	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY404	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY405	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY406	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY407	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY408	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY409	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY410	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY411	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY412	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY414	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY415	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY416	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY417	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY419	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY420	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY421	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY422	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY423	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY501	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY801	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY802	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY803	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY807	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY808	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY809	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY810	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY813	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY818	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY819	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY821	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY822	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY823	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY824	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY825	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY827	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY828	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY829	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY830	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY833	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY850	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY851	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY852	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY853	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY860	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EY861	AA60-40011A	K EYELET;ID2.0,OD2.8,BST	
2	EL301	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL302	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL403	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL404	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL407	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL408	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL501	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL502	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL601	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL602	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL603	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL604	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL801	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL802	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	EL804	AA60-40011B	K EYELET;ID2.2,OD3.2,BSP	
2	GT101	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT501	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT804	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT805	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT806	AA60-40014A	PIN-GT,ASSY;AUTO	
2	GT807	AA60-40014A	PIN-GT,ASSY;AUTO	
2	R302	2004-004969	R-METAL(S);1.1Kohm,1%,1/2W,AA,TP,2.4x6.4	
2	R303	2008-001133	R-FUSIBLE(S);0.75ohm,5%,2W,AF,TP,3.9x10m	
2	R306	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
2	R421	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
2	C104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	C912	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	D202	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
⚠ 2	D802	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J103	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J104	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J105	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J106	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J108	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J110	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J112	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J113	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J114	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J120	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J121	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J122	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J123	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J124	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J126	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J127	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	
2	J128	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-,	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	J129	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J131	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J132	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J133	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J134	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J135	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J136	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J138	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J139	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J140	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J141	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J143	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J145	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J146	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J147	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J148	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J150	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J151	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J152	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J153	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J154	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J155	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J156	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J157	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J158	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J159	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J160	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J163	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J167	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J168	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J169	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J170	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J171	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J173	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J174	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J175	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J176	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J177	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J180	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J181	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J182	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J183	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J184	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J185	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J186	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J187	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J189	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J190	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J191	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J192	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J193	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J195	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J196	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J198	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J199	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J200	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J204	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J207	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J209	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J211	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J212	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J213	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J214	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J401	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J601	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J603	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J705	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J803	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J807	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J812	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J814	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J902	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	J913	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	L910	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	NT801S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R101	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R102	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R107	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R229	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R309	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R406	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
⚠ 2	R422S	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R507	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R508	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R509	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R805	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	R850	BH39-40362W	CBF-HARNESS;-,JUMPER,0.6PHI,ROLL-TYPE,-	
2	CN705A	AA95-03087A	ASSY SUB-PCB NICAM;CZ21S4,STEREO	
3	ICS02	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
3	RS02	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS03	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS06	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS07	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS04	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS01	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS14	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS08	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	RS09	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
3	CS26	2201-000112	C-CERAMIC,DISC;1.5NF,10%,50V,Y5V,TP,5X3.	
3	CS01	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
3	CS29	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
3	CS30	2201-000304	C-CERAMIC,DISC;0.001NF,0.25PF,50V,C0G,TP	
3	CS20	2201-000472	C-CERAMIC,DISC;0.33nF,5%,50V,SL,TP,8.5x3	
3	CS22	2201-000472	C-CERAMIC,DISC;0.33nF,5%,50V,SL,TP,8.5x3	
3	CS07	2201-000982	C-CERAMIC,DISC;10nF,+80-20%,50V,Y5V,TP,4	
3	CS27	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	CS28	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
3	CS09	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
3	CS35	2301-000111	C-FILM,PEF;1.8nF,5%,50V,TP,6.5x3.0x5.5mm	
3	CS15	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
3	CS17	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
3	CS23	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
3	CS19	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
3	CS21	2401-000027	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
3	CS24	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
3	CS12	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS13	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS14	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS11	2401-000486	C-AL;10uF,20%,50V,GP,TP,6.3x7mm,5	
3	CS06	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	CS18	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
3	CS16	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	CS25	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
3	CS03	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
3	LS03	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
3	LS01	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
3	LS04	2701-000184	INDUCTOR-AXIAL;4.7uH,10%,2.5x3.4mm	
3	XS01	2801-003903	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,12pF	
3	JS01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS02	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS03	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS04	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	JS05	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
3	PCB	AA41-00139A	PCB-STEREO/LINE-ST/MTS-M;DREAM-1,1L,FR-1	
3	ICS01	1204-001775	IC-SOUND PROCESSOR;MSP3410D-C5 9458 ,SDI	
3	CN706	3711-002706	CONNECTOR-HEADER;NOWALL,8P,1R,2.5mm,ANGL	
3	CN705	3711-002708	CONNECTOR-HEADER;NOWALL,10P,1R,2.5mm,ANG	
3	CN707	AA39-00276A	LEAD CONNECTOR-ASSY;,UL1185#26,UL/CSA,6P	
3	CN702	AA39-00095A	LEAD CONNECTOR-ASSY;,3(2)P,YBNH250-03,35	
3		AA98-00253A	ASSY SUB PART;KS1A,NICAM MODULE	
4		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
4		0204-001095	THINNER;#4520,-,-,-	
4		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	NT802S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
⚠ 2	P803S	1404-001156	THERMISTOR-PTC;9OHM,+30%/-20%,220VRMS,27	
⚠ 2	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,TP,-,22.5mm	
⚠ 2	SF101S	2904-000302	FILTER-SAW AV;38.9MHz,SIP5K,ST,15.4dB,B/	
⚠ 2	SF102S	2904-001224	FILTER-SAW AV;38.9MHz,SIP5K,ST,16.3dB,B/	
⚠ 2	T401	AA26-50001B	TRANS-HORIZ.DRIVE;-,-,-,7.1mH,-,-,102uH,	
⚠ 2	LX801S	AA29-30001D	FILTER LINE NOISE;SQ1913,-,6.0MH,0.8A,-	
⚠ 2	TU01S	AA40-00076A	TUNER;TECC0949PG35A(S),PAL,181CH,38.	
2	LD901	AA96-00555A	ASSY LED GUIDE;-,-,UEX-LD-030,GREEN	

Level	Loc. No.	Code No.	Description ; Specification	Remark
2	IC501	AA96-00842A	ASSY H/S;,VIDEO,AA62-30175D,TDA6107Q	
3	IC501	1201-001541	IC-VIDEO AMP;6107,ZSIP,9P,-,SINGLE,-,PLA	
3	SCR501	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3	H/S501	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	
⚠ 2	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
2	RM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
⚠ 2	IC801S	AA96-00845A	ASSY H/S;,POWER,AA62-30186B,KA5Q0765R	
⚠ 3	IC801	1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M	
3	SCR801	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	
3	H/S801	AA62-30186B	HEAT SINK-ES;-,-,-,SILVER,171J + COVER-H	
3		HA68-02189A	LABEL-WARNING;,33MM,18MM,WHITE	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
⚠ 2	IC802	AA96-00846A	ASSY H/S;,POWER,AA62-00055A,KA7632	
⚠ 3	IC802	1203-001939	IC-POSI.FIXED REG.;7632,SIP,10P,-,PLASTI	
3	H/S802	AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-	
3	SCR802	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
2	IC902	1103-001106	IC-EEPROM;C81DC,1028x8Bit,DIP,8P,300MIL,	
⚠ 2	SW801S	3403-001107	SWITCH-PUSH;250V,5A,DPST,-,KDC-A04	
2	Q401	0502-001160	TR-POWER;2SD2499,NPN,50000mW,TO-3P,BK,8	
2	JS701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	TOP	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,YFH800-01,S,400,	
2	CN501	AA39-20620C	LEAD CONNECTOR-ASSY;,9P,YBNH250-09,S,500	
2	IC301	AA96-00847A	ASSY H/S;,AA62-00046A,LA7840	
3		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
2	C801	2401-002221	C-AL;220uF,20%,450V,GP,ST,25x40,10	
⚠ 2	CR402S	2306-000350	C-FILM,MPPF;270NF,5%,400V,TP,26X18.5X10M	
⚠ 2	T444S	AA26-00116A	TRANS FBT;FSV-14A004H(S),CT15A8,3.24MH,1	
2	SUB	AA98-00079A	ASSY SUB PART;KS1A,MAIN(OPT),PAL,-	
3		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
3		0204-001095	THINNER;#4520,-,-,-	
3		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	
⚠ 2	LR401S	AA27-30001B	COIL LINEARITY;-,195uH,QIC1010,PI0.4,4.5	
⚠ 2	CR410S	2303-001015	C-FILM,PPF;5.5nF,5%,1.6kV,TP,29x9.5x17,2	
2	LW01	AA27-40001M	COIL HORIZ. WIDTH;-,180/480uH,SB-5S6202.	
⚠ 2	CY801S	2201-000446	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,15x	
⚠ 2	T801S	AA26-00134A	TRANS SWITCHING;,CS21S5T,160V~260V,PM2 P	
2	T101	AA26-00025A	TRANS RF;7MG,-,-,-,10pF,-,58.35MHz,7.7x	
2	IC601	AA96-00923A	ASSY H/S;,AUDIO,AA62-00064A,TDA8944,BRK	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		1201-001741	IC-AUDIO AMP;TDA8944J,DBS,17P,937MIL,DUA	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA61-10162B	BRACKET-IC;-,SBHG-1,T1.0,-,-,-100	
3		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-	
⚠ 2	D806	AA96-00922A	ASSY H/S;,BRIDGE,AA62-00065A,D06U20S,KS	
3		0205-000129	GREASE-SILICON;SC102,JAPAN	
3		0402-001374	DIODE-RECTIFIER;FFPF06U20S,200V,6A,TO-22	
3		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
3		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-	
2	IC101	1204-001583	IC-IF CIRCUIT;U4468B,DIP,16P,-,PLASTIC,5	
2	CN701	3711-000628	CONNECTOR-HEADER;BOX,11P,1R,2.5MM,STRAIG	
2	CN602	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
2	CN707A	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
2	Q803	0502-000242	TR-POWER;KSA614,PNP,25W,TO-220,TP,40-24	
⚠ 2	IC201S	AA09-00287A	MICOM;TDA9351/N2/3I,SPM-802EE2,64P,3.	
2	CN401	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	

ASSY CRT

1		AA94-05859A	ASSY CRT;A51EER31X,+400MG,21	
⚠ 2		AA03-00279A	CRT COLOR;A51EER33X,+380MG,2.07MH,21.0MH	
2		AA27-20003Z	COIL DEGAUSSING;-,21,13.5ohm,25T,L2380,E	
2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	
2		AA98-70030A	ASSY TBC WIRE(P);DP,21,AA98-70014C,1P,TV	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY ETC-PCB,A/V SIDE

1		AA95-01709A	ASSY ETC-PCB,A/V SIDE;,21D8,KS1A,STEREO	
2	RE01	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	RE02	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
2	CE04	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE05	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
2	CE07	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE08	2202-000222	C-CERAMIC,MLC-AXIAL;3.3nF,20%,16V,Y5P,TP	
2	CE01	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	CE02	2401-001840	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
2	LE04	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE05	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
2	LE01	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	LE02	2701-000158	INDUCTOR-AXIAL;22uH,10%,2.5x3.4mm	
2	JE01	3812-000219	WIRE-NO SHEATH CU;TCWA,300V,52mm(TAPING)	
2	PCB	AA41-00567A	PCB-SIDE AV;CS21D8,FR-1,1L,A,1.6T,245X24	
2	CN704A	AA39-00094A	LEAD CONNECTOR-ASSY;,3(2)P,YBNH250-03,35	
2	JE601	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
2	JR01	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
2	CN702	AA39-20461C	LEAD CONNECTOR-ASSY;,11P,YBNH250-11,6709	
2		0202-000008	SOLDER-WIRE;S63S-W3.0,S63S,D3,63Sn/37Pb,	
2		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	
2		0204-001095	THINNER;#4520,-,-,-	
2		0202-001046	FLUX;CF-110VH-2A,-,-,-,-	

ASSY POWER CORD

⚠ 1		AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25	
2		AA39-10001G	CBF POWER CORD;-,KKP-419C,KLCE-2F,2.286m	
2		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	

REMOCON

1		AA59-00104K	REMOCON;-,TM59,DREAM,29,L/GRAY,PAL-TTX	

ASSY BOX

1		AA92-07496A	ASSY BOX;21V5	
2		AA69-01926A	PACKING CASE;21V5(SEH),D-2 BB ,645,560,5	
2		HA68-02178A	LABEL-BOX;250MM,89MM,WHITE	
2		HA83-00046A	LP-TAPE INK;,WIDTH 105 MM	

ASSY COVER FRONT

1		AA90-04474A	ASSY COVER FRONT;21V5	
2	CB+CF	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
2	CRT+CF	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	
2		AA96-01295A	ASSY COVER P-FRONT;21V5,HIPS HB,SILVER	
3	KC+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	SPK+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	WR+CF	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	
3		AA64-03113A	KNOB-POWER;21V5,ABS,HB,G3676,SVM3012	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20	
3		AA64-03112A	KNOB-CONTROL;21V5,ABS,HB,G3676,SVM3012	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
3		AA64-03111A	CABINET-FRONT;21V5,HIPS,HB,G4309,SV012P	
4		HA83-00012A	LP-RESIN;,M BATCH,WILSON 6053-GY-60,GRY	
4		HA83-00040A	LP-MARKING PAINT;,METALLIC SILVER,SV-012	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		AA81-00106A	A/S-MARKING PAINT;,P432U,DARK GREY,TPC	

Level	Loc. No.	Code No.	Description ; Specification	Remark
3		HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	
3		3001-000274	SPEAKER;5W,8OHM,90DB,160HZ	
3		AA39-20505M	LEAD CONNECTOR-ASSY;,4P,YSH025-04,REC,35	
3		AA64-03114A	WINDOW-RMC,LED;21V5,PC,CLR	
3		AA64-01309H	INLAY AV;PS SHEET,21D8,T0.3,-,-,-,S15A L	
3		HA61-00721A	HOLDER-RAIL;TOOL,21F5(SEH),-,-,-,-,-,MOL	
4		HA83-00006A	LP-RESIN HIPS;,BASF495F,NTR,HB	
4		HA83-00011A	LP-RESIN;,M BATCH,WILSON 6007-GY-60,GRY	
3		AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-	
3		AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2		HA68-02179A	LABEL-RATING;58MM,53MM,WHITE	
2	RATING	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2	qms la	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	
2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	
2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	
2		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	
2	CF+PCB	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
2		HA60-00140A	SPACER-GUM;SPACE	
2		HA68-02177B	LABEL-PQS;ALL,30MM,65MM,WHITE,AA68-02177	
2		AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,	

ASSY COVER REAR

1		AA90-04476A	ASSY COVER REAR;21V5,SEH	
2		AA64-02902A	CABINET BACK;21H4(SEH),HIPS,HB	
3		AA63-60001L	SPACER-FELT;-,FELT,-,-,-,BLK,T0.35,-,150	
3		AA81-00096A	RESIN-A;VL-1823,G5433,A	
2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	

ASSY ACCESSORY

1		AA94-05817A	ASSY ACCESSORY;20-21,KS1A,XEH	
2		HA68-00320A	LABEL CAUTION;-,S15A,CEFTA,-,-,-	
2		HA68-00336B	CARD-WARRANTY;A/P100(G),A5,NEW VERSION,I	
2		4301-000120	BATTERY-MN;1.5V,-,AA,14.5x50mm,-	
2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	
2		HA69-00276A	BAG VINYL;HDPE,T0.025,L400,W240,-,W/O LO	

ASSY P/MATERIAL

1		AA92-07503A	ASSY P/MATERIAL;21V5	
2		AA69-00744C	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1050,H9	
2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	
2		AA69-01867A	CUSHION SET;21V5,PS FOAMED,C=0.02	
3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	

MEMO

8. Block Diagram

8-1 KS1A

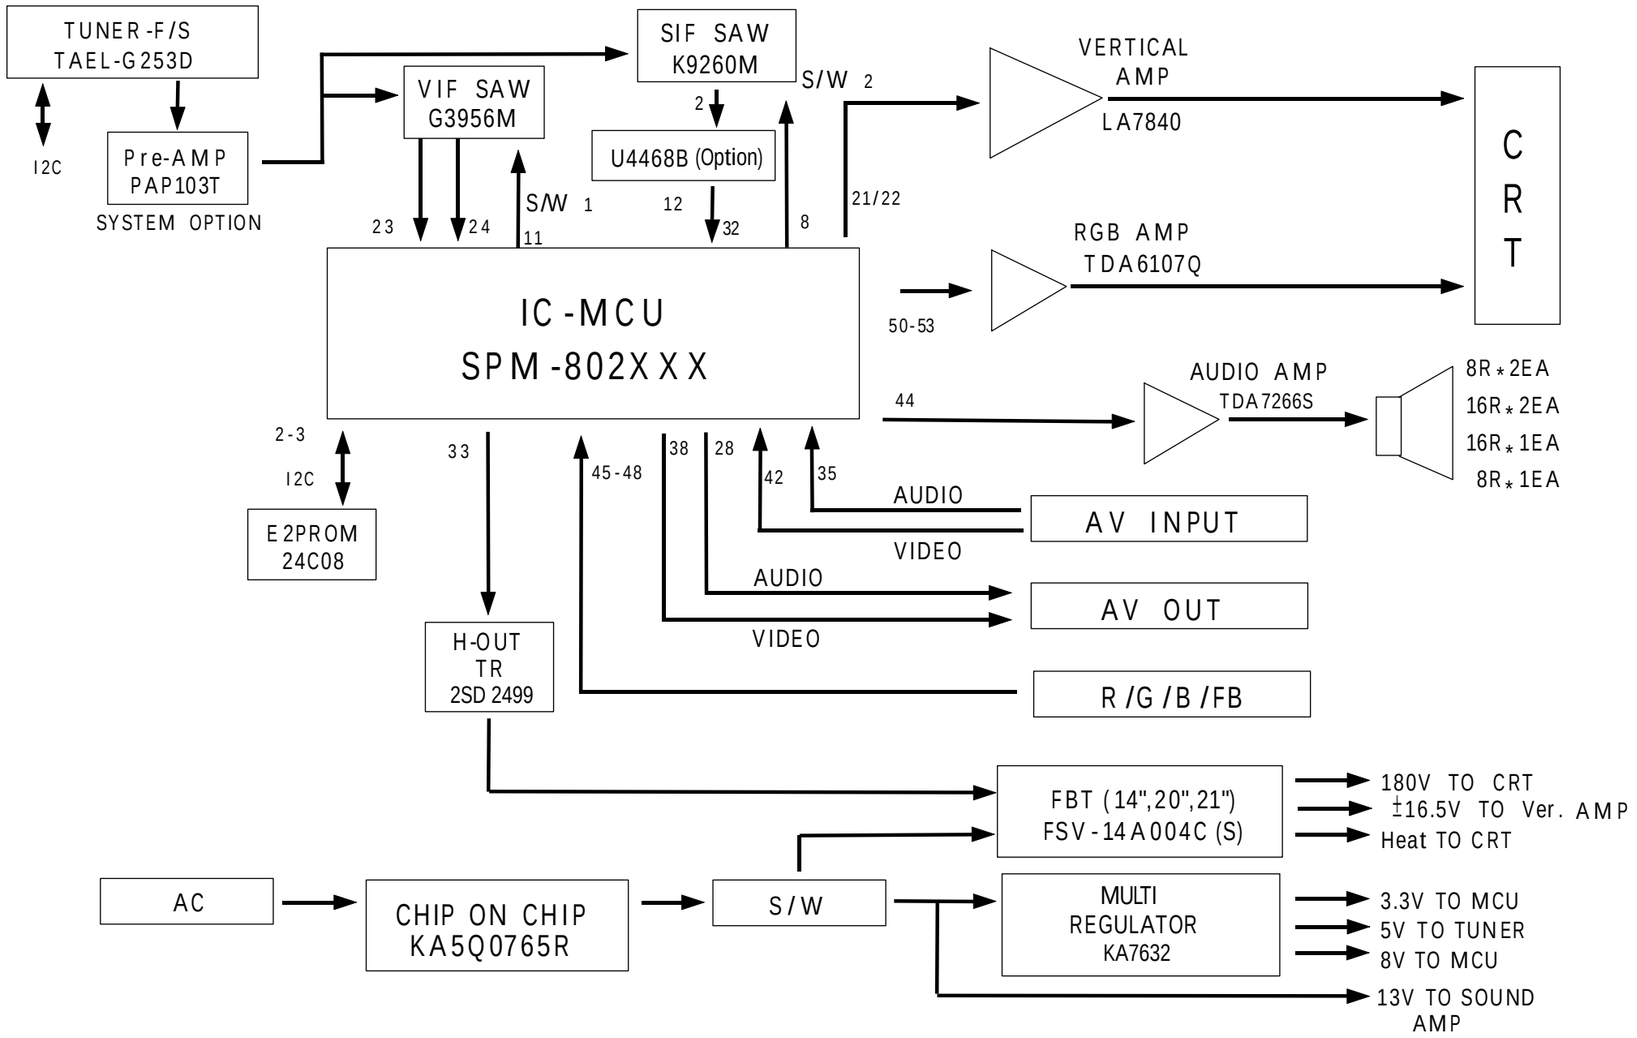

9. Wiring Diagram

9-1 KS1A

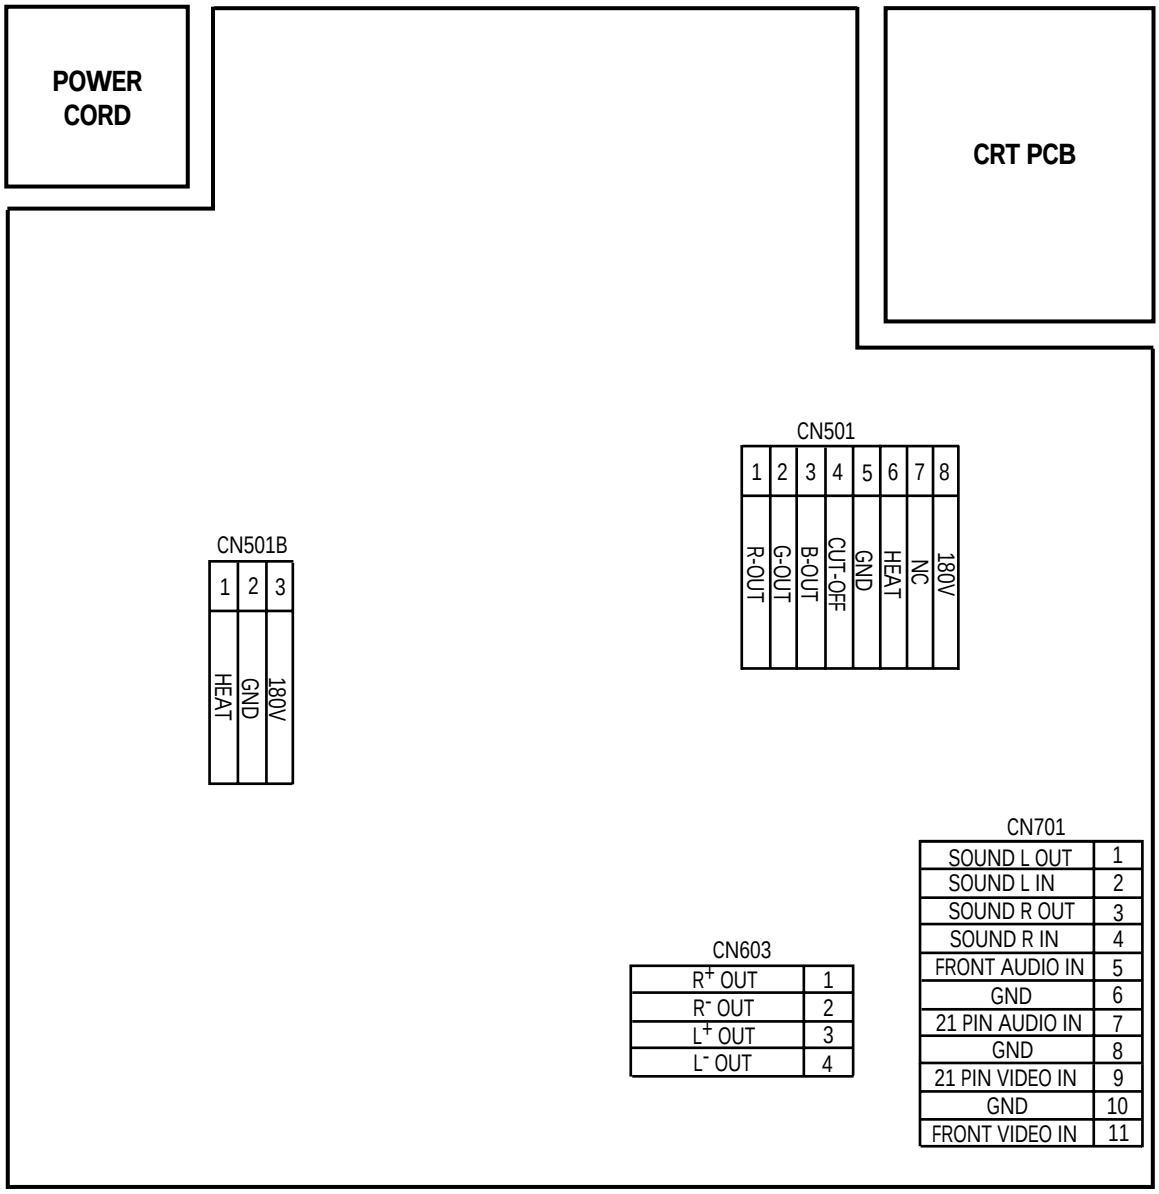

MEMO

10. Schematic Diagrams

10-1 IF & VIF/SIF & CHROMA

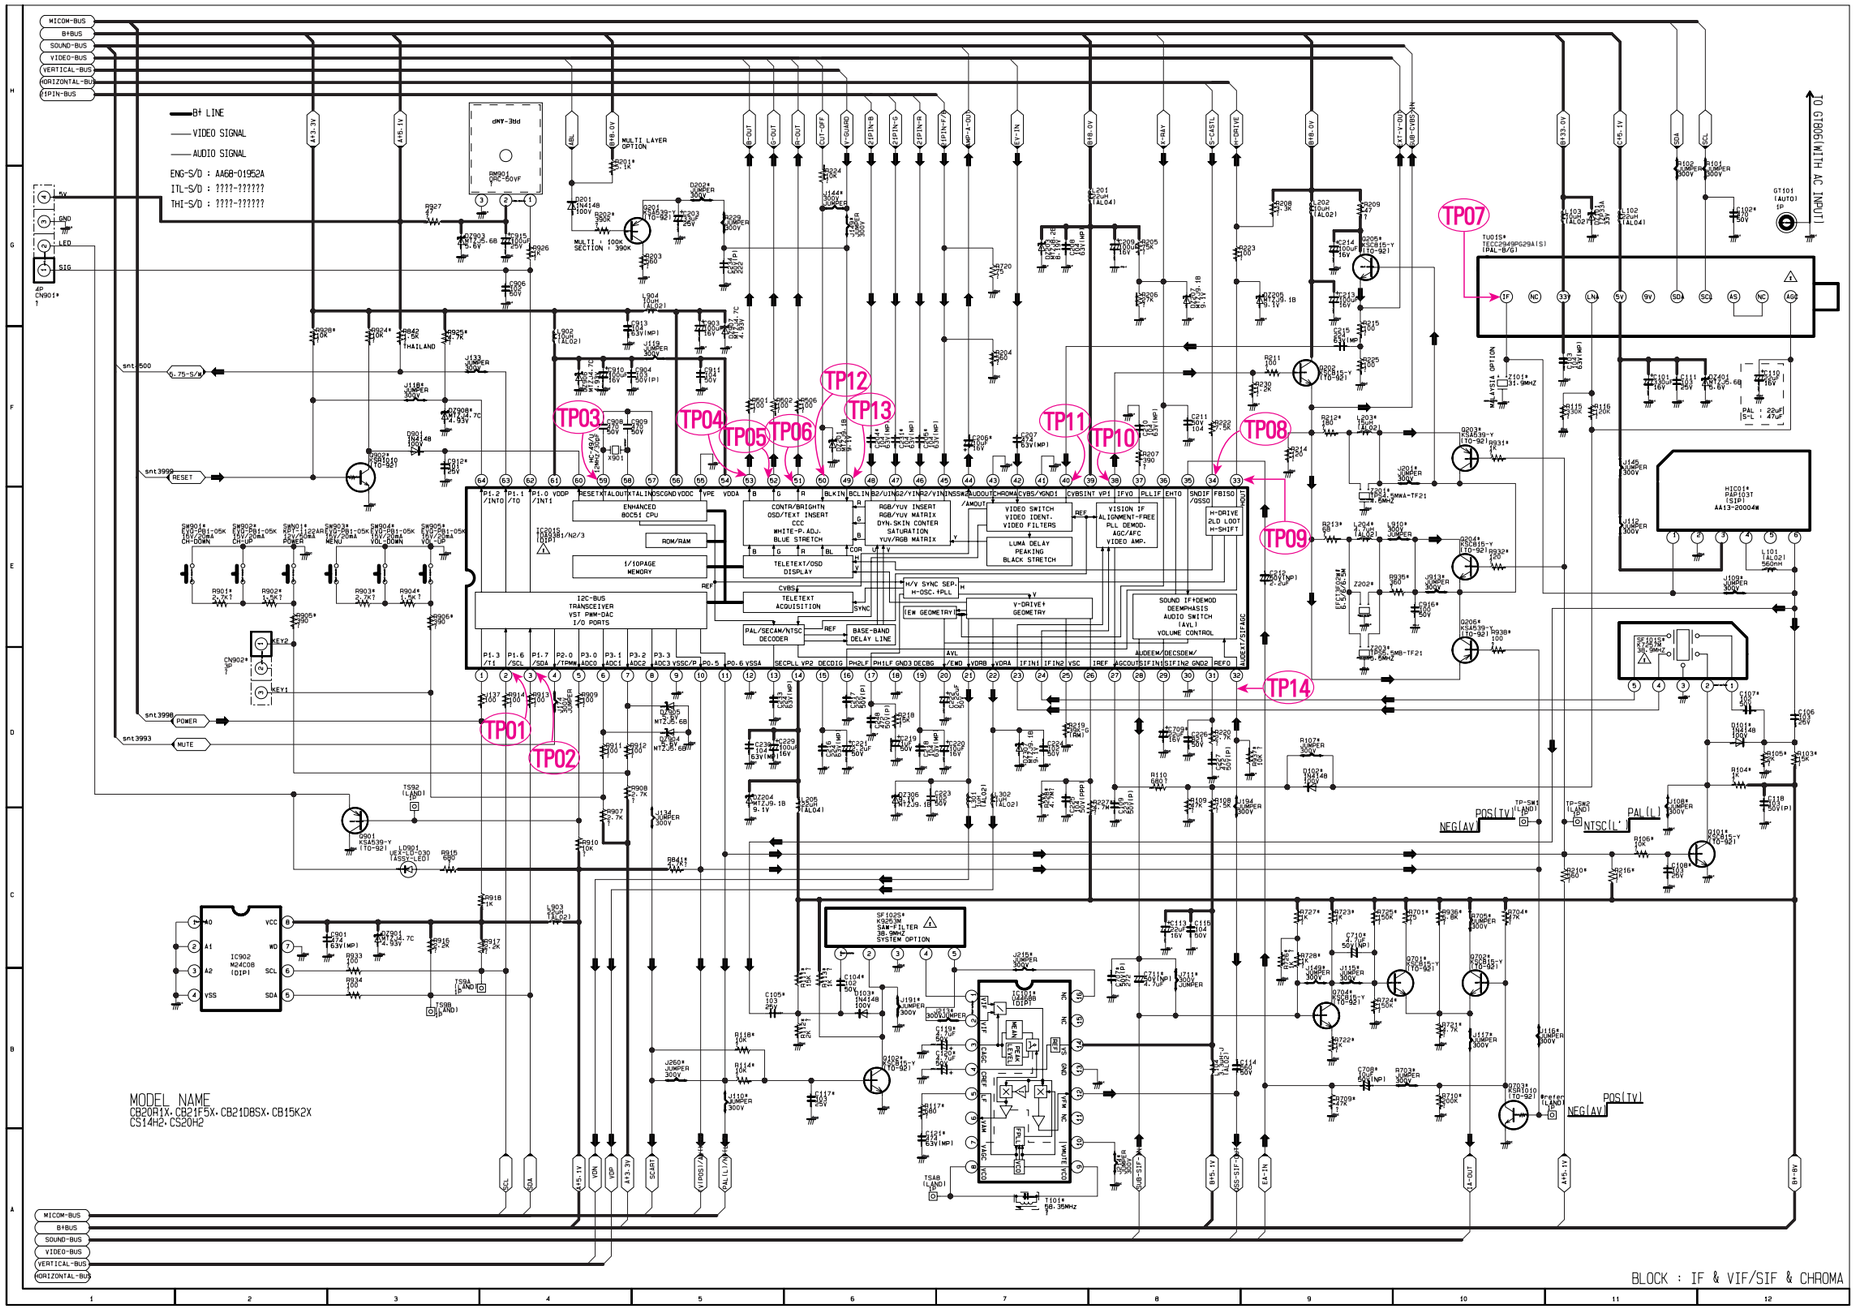

10-1-1 IF & VIF/SIF & CHROMA WAVEFORMS

TP01



TP02



TP03



TP04



TP05



TP06



TP07



TP08



TP09



TP10



TP11



TP12



TP13



TP14



10-2 A/V(RCA)-SW & SUB ASSY

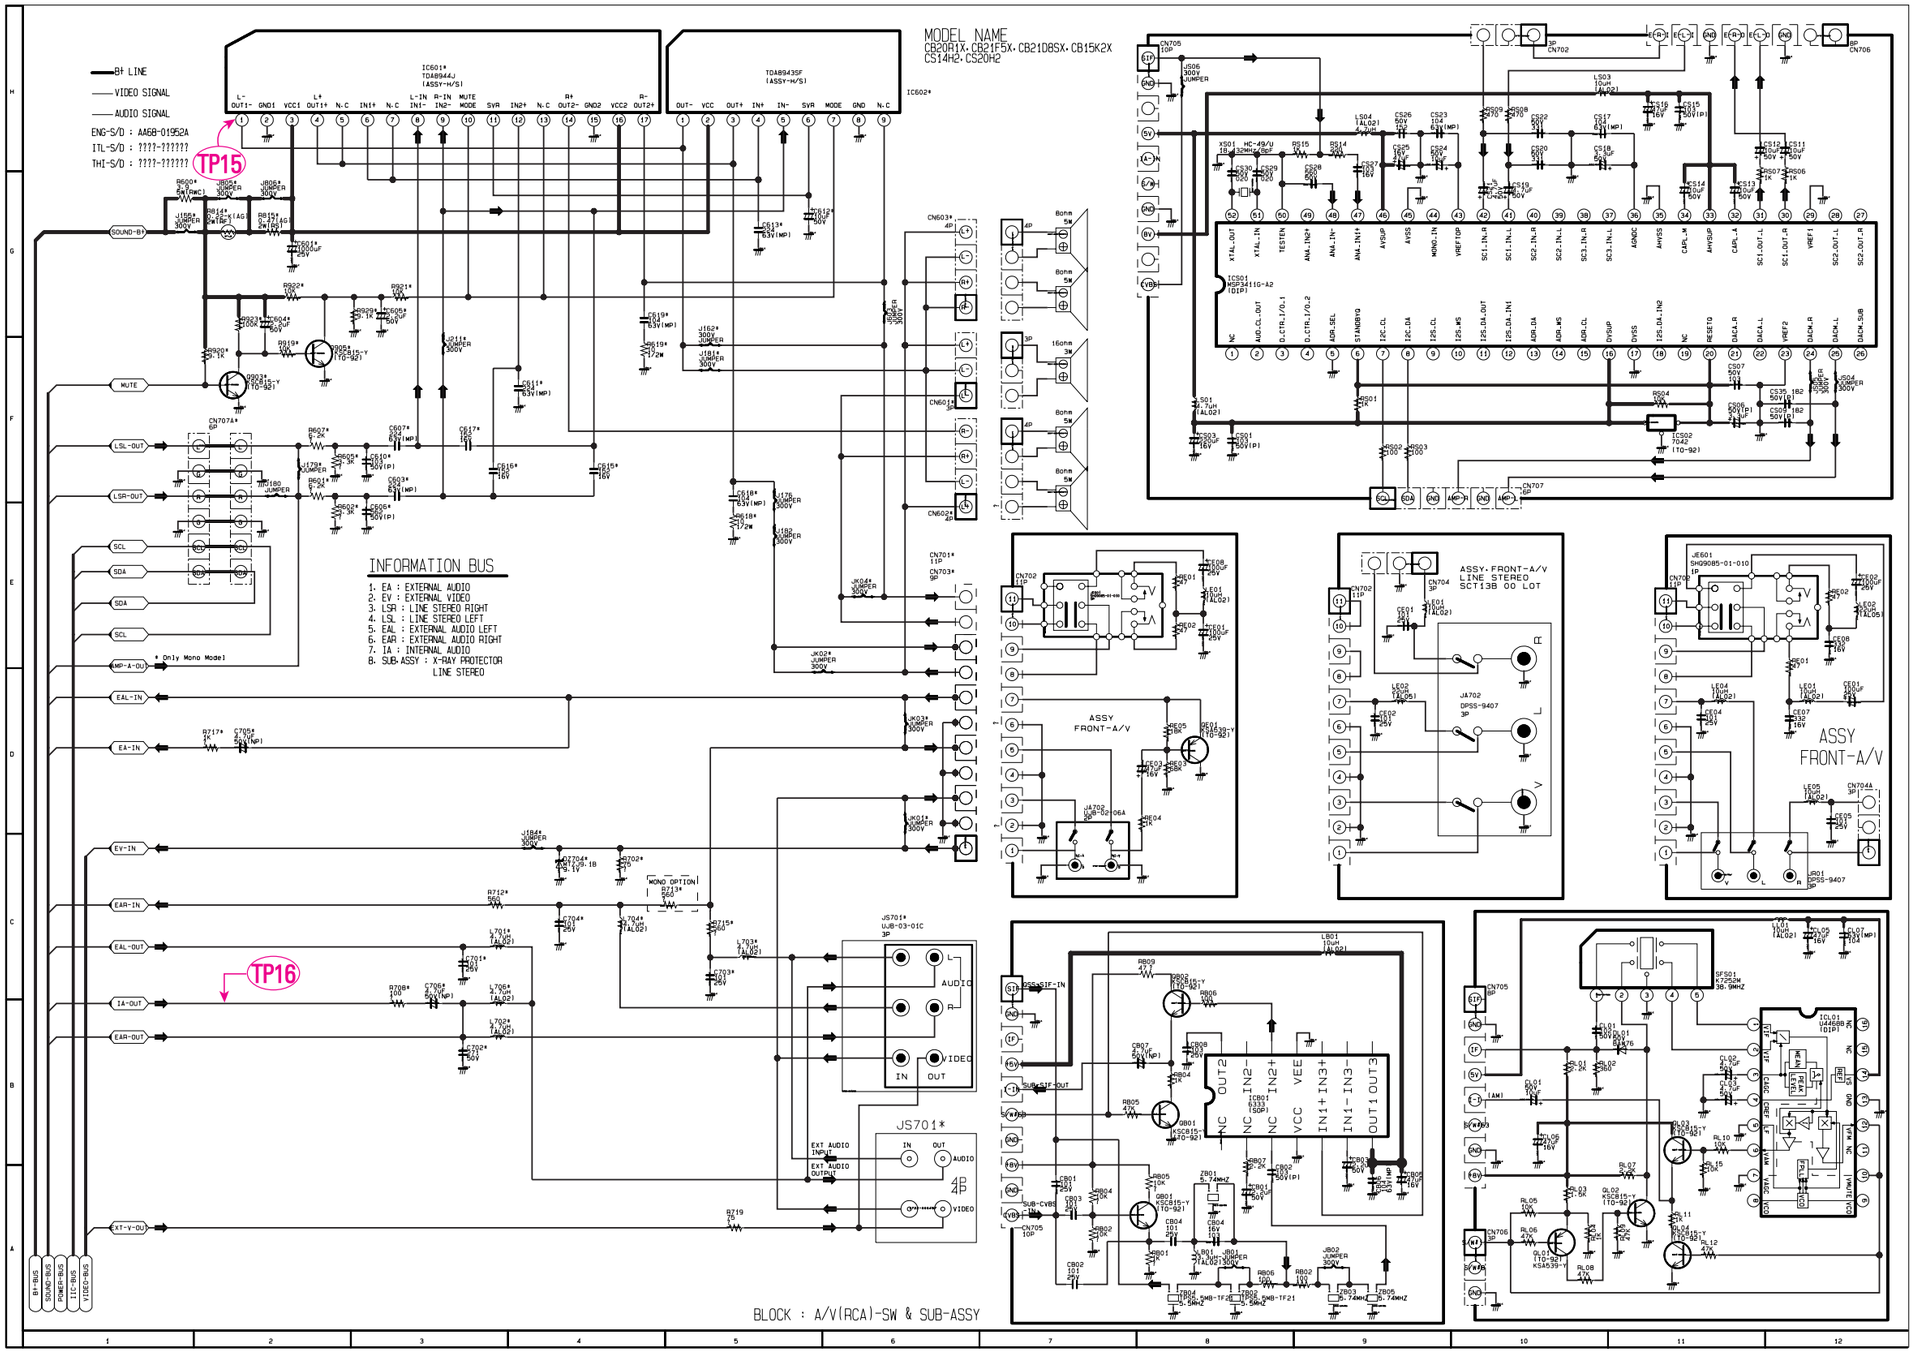

TP15



TP16



10-3 A/V(SCART)-SW & SUB-ASSY

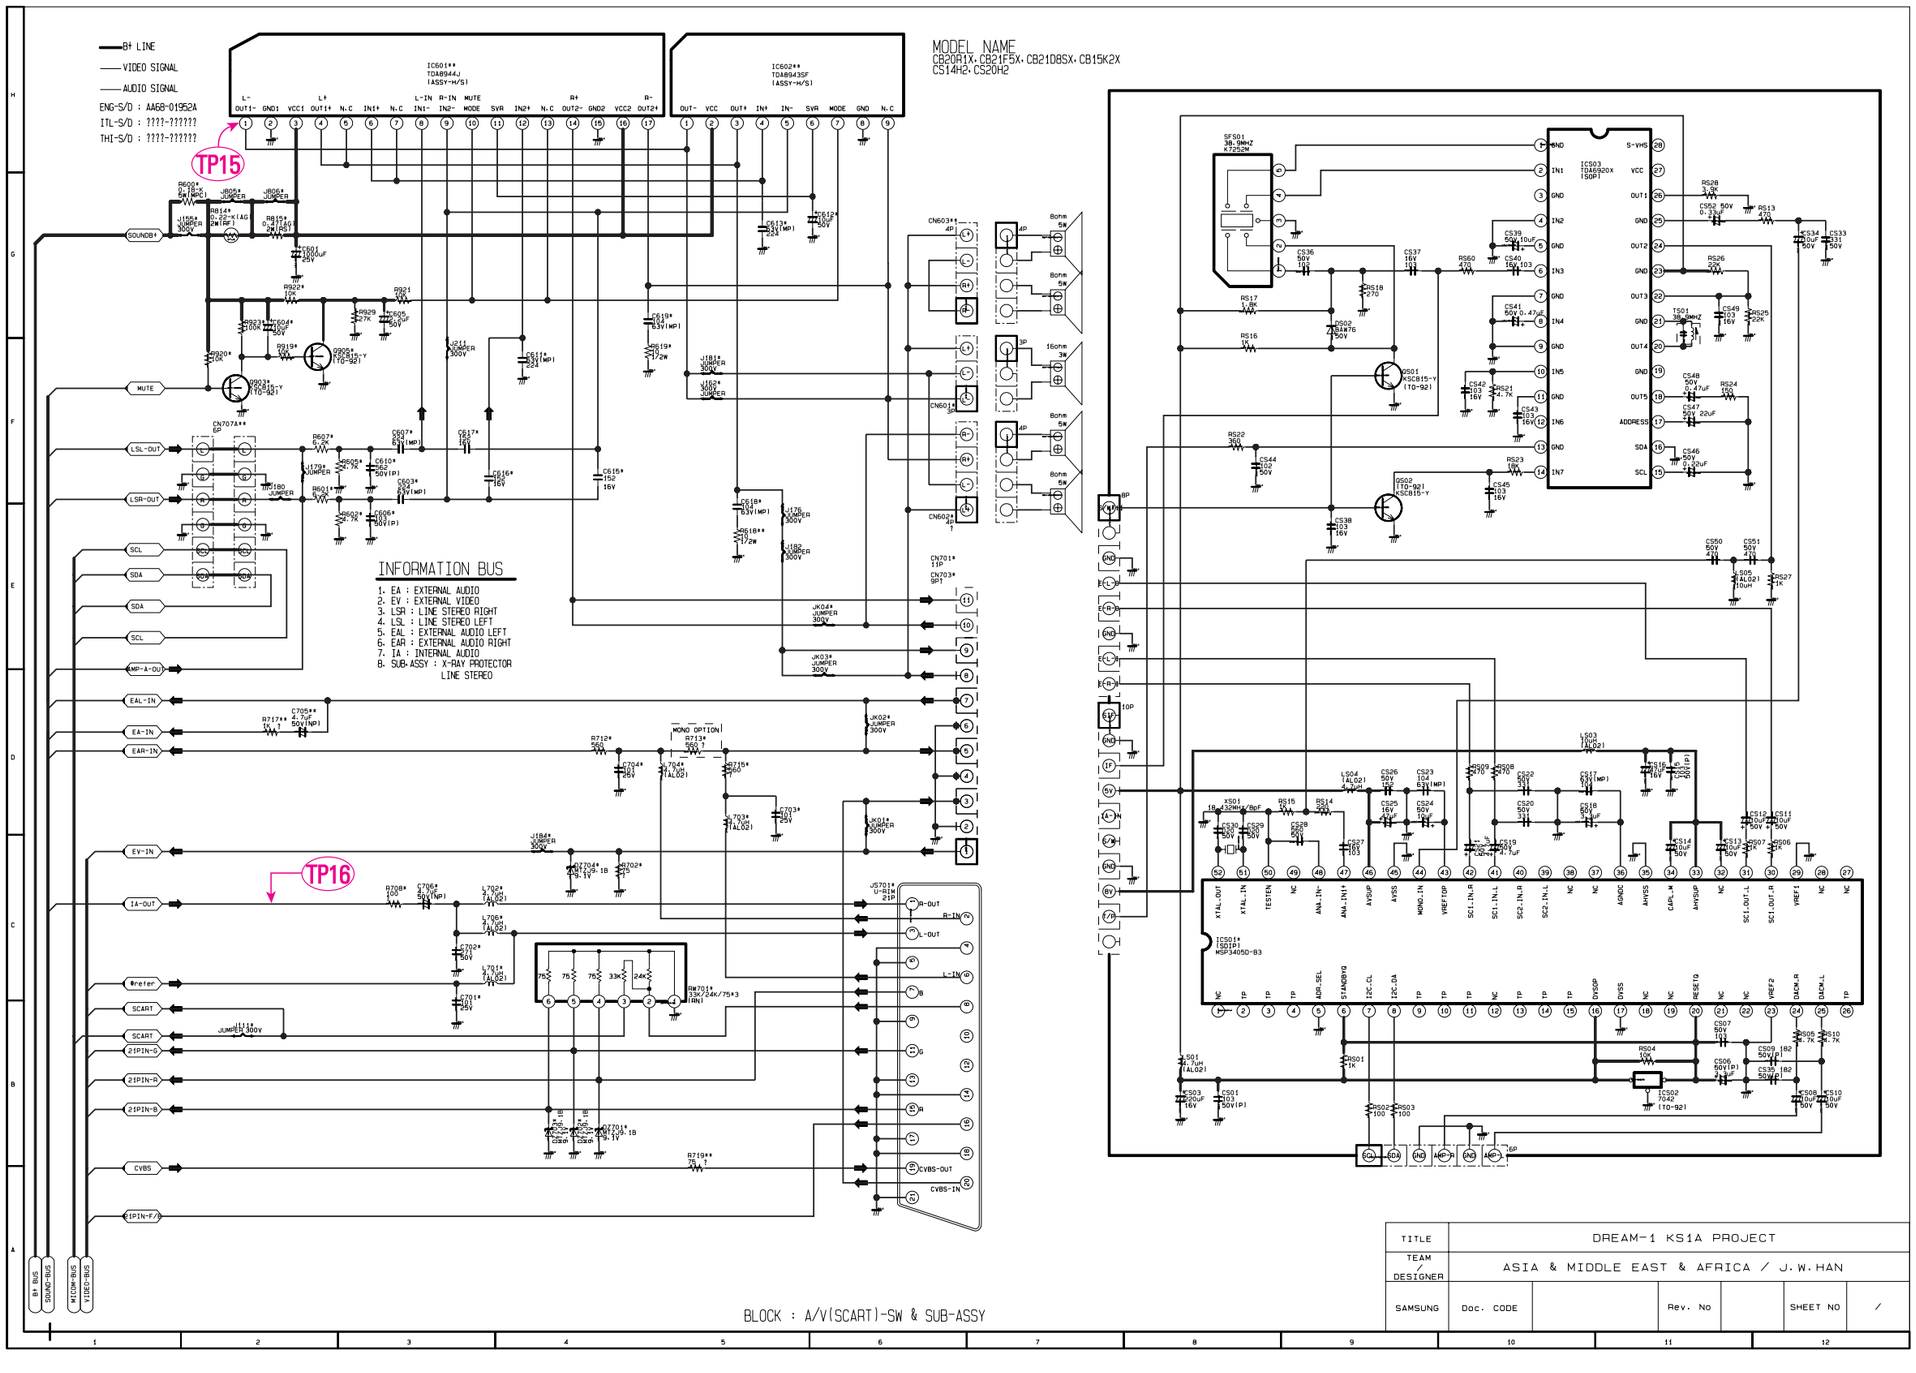

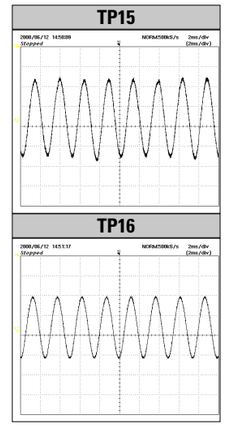

10-4 POWER & V/H-DEFLECTION & CRT

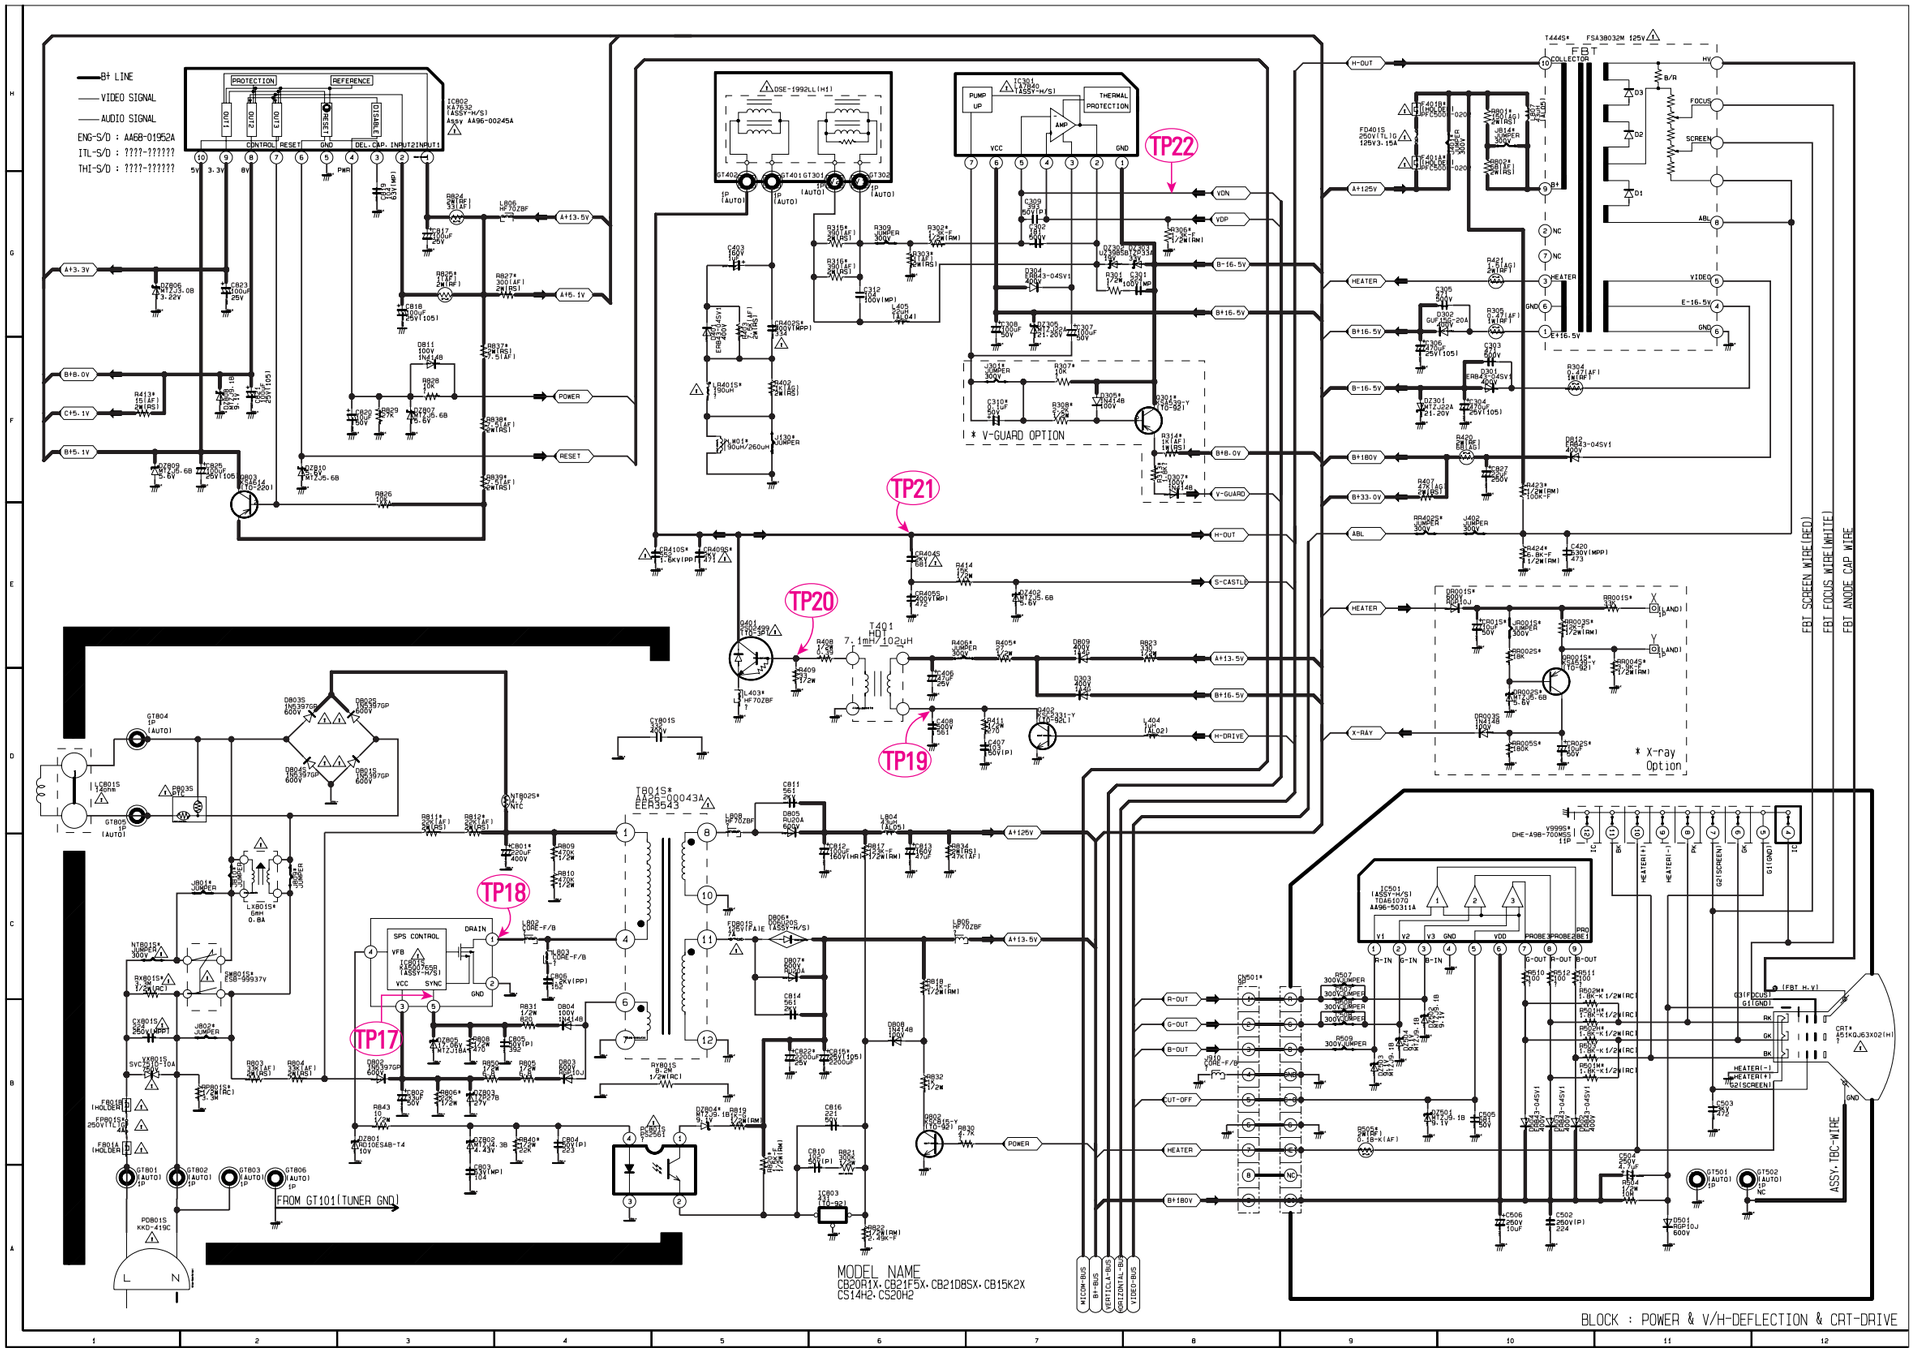

TP17



TP18



TP19



TP20



TP21



TP22



ELECTRONICS

© Samsung Electronics Co., Ltd. **Nov. 2002**
Printed in Korea
3KS1A-SEH-1109